



## 10-2

## 2-way control valve GVF 21 Series



(15A-40A)



(50A-150A)

### Summary

GVF21 is compatible with GEA Series and for heating, ventilation, HVAC or Temp. controlling. It is 2-way control valve made by ductile iron in flange type connection.

- Nominal stroke : DN 15 ~ DN 80 : 20mm  
DN 100 ~ DN 150 : 40mm

### Applications

- Allowable pressure : 10Kgf/cm<sup>2</sup>
- Applicable fluid and temp. : 1) up to 130°C for hot water  
2) up to -25°C for cold water
- Additives in water : 1) oxygen-absorbed mixtures  
2) Anti-freeze ethylene glycol up to 50%

### Technical Data

- Allowable pressure : 10Kgf/cm<sup>2</sup>(10bar)
- Applicable fluid and temp. : DIN4747 / DIN3158 at -25°C ~ 130°C
- Linear type
- Leakage : ≤ 0.01% of Kvs value Class IV (ANSI B 16.104)
- End connection : JIS 10K RF Type

※ Close-off pressure

Model	DN		Flow coefficient		Stroke	Sv	Actuator ΔPmax (kgf/cm <sup>2</sup> )		
	mm	Inch	Kv	Cv			GEA-20A(P)	GEA-35A(P)	GEA-55A(P)
GVF 21 · 15	15	1/2"	3	3.5	20	50	10	—	—
GVF 21 · 20	20	3/4"	5	5.8	20	50	10	—	—
GVF 21 · 25	25	1"	10	11.7	20	50	10	—	—
GVF 21 · 32	32	1 1/4"	16	18.7	20	50	10	—	—
GVF 21 · 40	40	1 1/2"	25	29	20	50	10	—	—
GVF 21 · 50	50	2"	39	45	20	50	7.8	—	—
GVF 21 · 65	65	2 1/2"	65	75.8	20	50	4.5	—	—
GVF 21 · 80	80	3"	91	106	20	50	3	—	—
GVF 21 · 100	100	4"	130	152	40	50	—	3.4	—
GVF 21 · 125	125	5"	188	219	40	50	—	2.0	3.4
GVF 21 · 150	150	6"	283	330	40	50	—	1.7	2.3

Sv : Rangeability (VDI 2173)

Kv = Cv / 1.167

ΔPV100 : Maximum allowable pressure difference of valve faces in full opening position with installation highly loaded


ΔPmax : Maximum allowable pressure difference of actuator not to leak fluid in closing position(close-off pressure)

Make sure to indicate valve Model in case of assembling valve of stroke 20mm and GEA035A(P) in order-sheet


※ Note : Cylinder balancing valve to be applied for over 4bar of valve pressure difference

## Materials

No	1	2	3	4	5
Part Name	Body	Cover	Plug/seat	Packing Box	Stem
Material	FCD45	FCD45	SCS13	Viton O-Ring	SUS304
	(A536)	(A536)	(A351CF8)		(AISI304)




## Mechanical design



- For the use under 0°C, ASZ(electrical heating units) is required not to make stem parts frozen
- Plug direct-coupled with valve stem
- Seat with special material attached to valve body

## Valve to select


### ► Diagram of flow

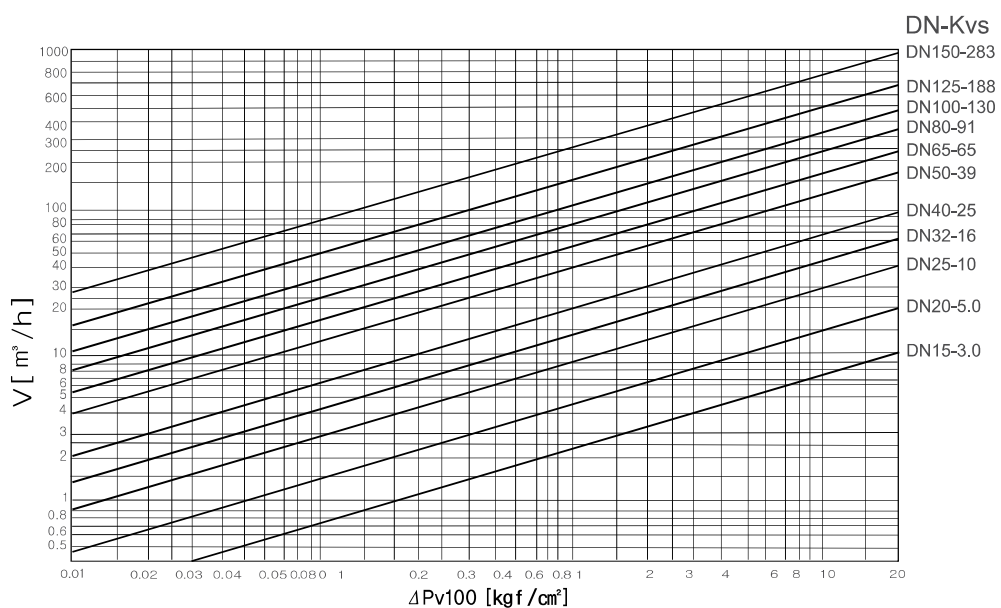

V : flow(m³/h)

ΔPv100 : valve pressure drop(kgf/cm²)


## Valve flows

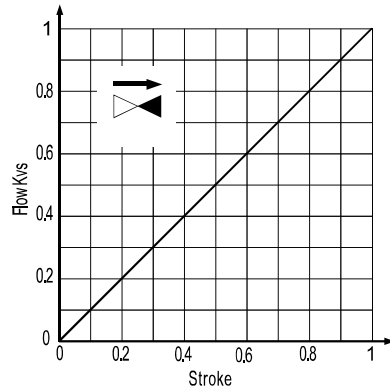

- Flow control of valve
- Linear
- Proportion of flow control - 50:1

## Mounting notes

- Recommend to install circulating line to protect valve stem normally
- Strainer installation recommended for higher safety rate of valve function

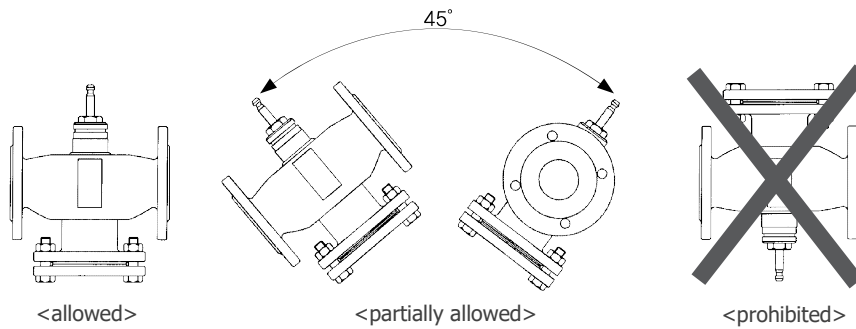

- Match the flow direction with marked direction( ➡ ) on valve body

## Guide for inspection


Inspect the valve in the status of right mounting of actuator

1. Close position with valve shaft upward
2. Open position with valve shaft downward

## Tips

- Valve packing replacement without disassembling in case of damage
- Packing box applicable for -25 ~ 130°C(hot and cold water)

## Shape dimension

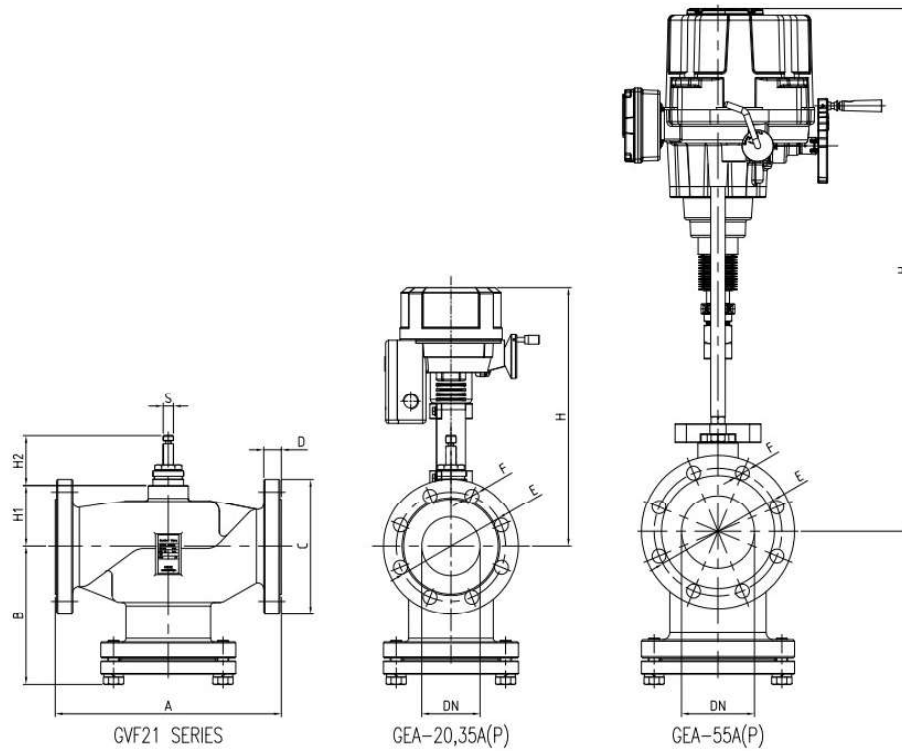

MODEL	DN	A	C	S	D	E	F	B	H1	H2	H			Weight Valve(Kg)
											GEA-20	GEA-35	GEA-55	
GVF 21.15	15	130	ø95	ø10	19	ø70	4-ø15	91.5	76.5	67.5	343.5	-	-	4.7
GVF 21.20	20	150	ø100	ø10	18	ø75	4-ø15	93	76.5	67.5	343.5	-	-	5.5
GVF 21.25	25	160	ø125	ø10	19	ø90	4-ø19	106.5	78.5	67.5	345.5	-	-	7.3
GVF 21.32	32	200	ø135	ø10	21	ø100	4-ø19	89	73.5	67.5	340.5	-	-	10
GVF 21.40	40	200	ø140	ø10	22	ø105	4-ø19	89	73.5	67.5	340.5	-	-	10.3
GVF 21.50	50	230	ø155	ø14	21	ø120	4-ø19	146	75.5	67.5	342.5	-	-	15.6
GVF 21.65	65	290	ø175	ø14	24	ø140	4-ø19	186	82.5	67.5	349.5	-	-	23.5
GVF 21.80	80	310	ø185	ø14	24	ø150	8-ø19	191	80.5	67.5	347.5	-	-	27
GVF 21.100	100	350	ø210	ø14	24	ø175	8-ø19	209	122.5	95	-	415.5	717.5	43
GVF 21.125	125	400	ø250	ø14	27	ø210	8-ø23	245	139.5	95	-	432.5	734.5	61
GVF 21.150	150	480	ø280	ø14	28	ø240	8-ø23	286	154.5	95	-	447.5	749.5	87

Units : mm

Specifications to be changed upon the production environment