

VEGATOR 132**Double-channel controller for point level detection with conductive sensors****Application area**

The VEGATOR 132 is a double-channel controller for conductive probes type EL. Applications are level detections and pump controls. In conjunction with multiple rod or cable probes, several VEGATOR 132 can be combined with a probe.

Your benefit

- Compact controller with alarm function for limit level
- Two independent level detections or one min./max. control (two-point control)
- Integrated fault monitoring with LED display detects line break
- Easy installation thanks to carrier rail mounting and detachable, coded terminals

Function

The VEGATOR 132 is a double channel limit level alarm and is mainly used for level detection in conjunction with conductive probes. All sensors of series EL can be connected. The signal circuit is permanently monitored on line break. An operating relay per channel as limit level alarm for control tasks is available as output.

Approvals

Worldwide approvals are available for VEGA instruments, e.g. for use in hazardous areas, on ships or in hygienic applications.

The technical data in the respective safety instructions are valid for approved instruments (e.g. with Ex approval). In some cases, these data can differ from the data listed herein.

You can find detailed information on the existing approvals with the appropriate product on our homepage.

Technical data**General data**

Series Module unit for mounting on carrier rails
35 x 7.5 acc. to EN 50022/60715

Connection terminals

– Wire cross-section 0.25 mm² (AWG 23) ... 2.5 mm² (AWG 12)

Voltage supply

Operating voltage

– Nominal voltage AC 24 ... 230 V (-15 %, +10 %), 50/60 Hz
– Nominal voltage DC 24 ... 65 V (-15 %, +10 %)

Max. power consumption 2 W (8 VA)

Sensor input

Quantity 2 x for connection of a conductive electrode

Input type Active (sensor power supply by VEGATOR 132)

Measured value transmission Alternating voltage

Response resistor 500 Ω ... 200 kΩ, adjustable

Terminal voltage (idle state) 10 V_{ss} rectangular voltage 75 Hz

Permissible line capacitance 200 nF

Relay output

Quantity 2 x operating relay

Contact Floating change-over contact (SPDT)

Switching voltage min. 10 mV DC, max. 253 V AC/50 V DC

Switching current min. 10 µA DC, max. 3 A AC, 1 A DC

Breaking capacity min. 50 mW, max. 500 VA, max. 54 W DC

Switch-on/Switch-off delay

– Basic delay 250 ms, ± 20 %

– Adjustable delay 2/6/8 s, ± 20 %

Ambient conditions

Ambient temperature at the installation site of the instrument -20 ... +60 °C (-4 ... +140 °F)


Electrical protective measures

Protection rating IP20

Oversupply category (IEC 61010-1)

Pollution degree 2

Electrical connection

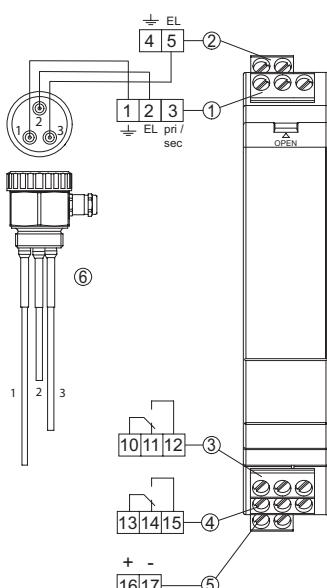


Wiring plan VEGATOR 132

- 1 *Sensor circuit 1 (terminal 1 + 2) and Primary/Secondary connection (terminal 3)*
- 2 *Sensor circuit 2 (terminals 4 + 5)*
- 3 *Relay output 1*
- 4 *Relay output 2*
- 5 *Voltage supply*

You can find details on electrical connection in the instrument operating instructions on our homepage at www.vega.com/downloads.

Dimensions

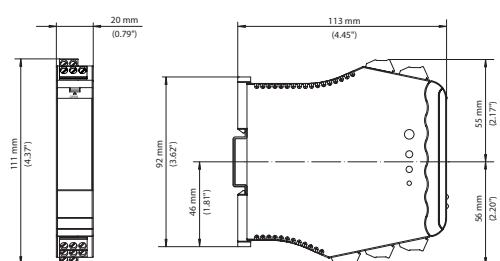

Dimensions VEGATOR 132

Information

You can find further information on the VEGA product line on our homepage.

In the download section of our homepage you'll find operating instructions, product information, industry brochures and approval documents as well as device and adjustment software.

Contact

You can find your personal contact person at VEGA on our homepage under "Contact".