

**VEGAPOINT 11****Transistor****Capacitive level switch****Technical data**

Output signal	Transistor output PNP
Process fitting	Thread G $\frac{1}{2}$ , G $\frac{3}{4}$ , G1, M24 x 1.5
	Thread 1/2 NPT, 3/4 NPT, 1 NPT
	Clamp 1", 1 1/2", 2"
	Further hygienic fittings
Process pressure	-1 ... 25 bar (-100 ... 2500 kPa/-14.5 ... 363 psig)
Process temperature	-20 ... +100 °C (-4 ... +212 °F)
Ambient temperature	-40 ... +70 °C (-40 ... +158 °F)
Operating voltage	12 ... 35 V DC

**Materials**

The wetted parts of the instrument are made of PEEK and stainless steel 316L. The process seal is made of FKM.

You will find a complete overview of the available materials and seals in the "Configurator" at [www.vega.com](http://www.vega.com) and "Products".

**Housing versions**

The housing is made of stainless steel 316L or Valox and is available in protection classes IP66/IP67 and up to IP69.

**Electronics versions**

The device is available in transistor version with IO-Link output.

**Approvals**

Worldwide approvals are available for VEGA instruments, e.g. for use in hazardous areas, on ships or in hygienic applications.

The technical data in the respective safety instructions are valid for approved instruments (e.g. with Ex approval). In some cases, these data can differ from the data listed herein.

You can find detailed information on the existing approvals with the appropriate product on our homepage.

**Application area**

The VEGAPOINT 11 is a capacitive level sensor for level detection of water-based liquids.

Typical applications are overfill and dry run protection. The small sensor can also be used in thin pipelines.

**Your benefit**

- Low time and cost expenditure due to simple commissioning
- High plant availability, because wear and maintenance free
- Exact switching function independent of process condition

**Function**

An alternating electric field is generated at the tip of the measuring electrode. If the sensor is covered with medium, the capacitance of the sensor changes. This change is detected by the electronics and converted into a switching command.


Any buildup is ignored to a certain degree and therefore has no influence on the measurement.

## Adjustment

No adjustments on the instrument are necessary. The switching function is determined by the electrical connection.

## Electrical connection

### M12 x 1 plug




Wiring plan M12 x 1 plug - Transistor output, three-wire

- 1 *Voltage supply*
- 2 *PNP switching*


Details on the electrical connection can be found in the operating instructions of the device in the download area on our homepage.

## Dimensions

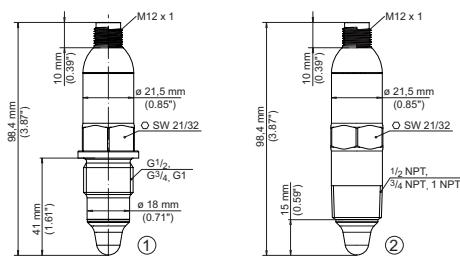

VEGAPOINT 11, standard version - thread

- 1 Thread G $\frac{1}{2}$ , G $\frac{3}{4}$ , G1 (DIN ISO 228/1) with M12 x 1 plug connection
- 2 Thread  $\frac{1}{2}$  NPT,  $\frac{3}{4}$  NPT, 1 NPT with M12 x 1 plug connection

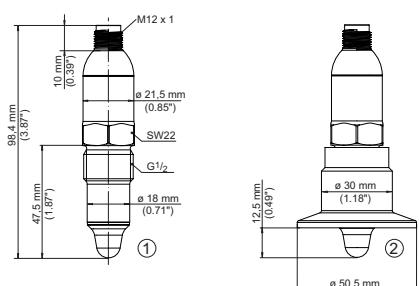

VEGAPOINT 11, hygienic version - Thread

- 1 Thread G $\frac{1}{2}$  for hygienic threaded adapter (DIN ISO 228/1) with M12 x 1 plug connection
- 2 VEGAPOINT 11, hygienic version in threaded adapter, Clamp

## Information

You can find further information on the VEGA product line on our homepage.

In the download section of our homepage you'll find operating instructions, product information, industry brochures and approval documents as well as device and adjustment software.

## Instrument selection

On our homepage under "Products" you can select the suitable measuring principle and instrument for your application.

There you will also find detailed information on the available device versions.

## Contact

You can find your personal contact person at VEGA on our homepage under "Contact".