



Insertion fitting for volume flow rate or analysis measurements

- Universal fitting for Insertion measuring devices for neutral, aggressive or contaminated fluids
- A wide range of process connections: DN 06...DN 400 in PVC, PP, PVDF, PE, stainless steel or brass
- Transmitters can be supplied for display, monitoring, signal transmission, 2-point control and dosing control

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 8020 Insertion flowmeter with paddle wheel for continuous flow measurement	▶
	Type 8025 Insertion flowmeter or batch controller with paddle wheel and flow transmitter or remote batch controller	▶
	Type 8026 Insertion flowmeter with paddle wheel, ELEMENT design	▶
	Type 8041 Electromagnetic Insertion flowmeter	▶
	Type 8045 Electromagnetic Insertion flowmeter	▶
	Type 8228 Inductive conductivity meter, ELEMENT Design	▶
	Type 8200 Holder for analysis probes	▶

Type description

The Type S020 fitting can be used to connect any Insertion devices for in-pipeline measurement, such as for flow rate, pH, redox potential (ORP) or conductivity measurements.

The fitting is available for paddle-wheel and magnetic inductive flowmeters, as well as analysis measurement devices, with G 2" or clamp connections.

Table of contents

1. General technical data	4
2. Approvals and conformities	5
2.1. General notes	5
2.2. Conformity	5
2.3. Standards	5
2.4. Pressure Equipment Directive (PED)	5
Device used on a pipe.....	5
2.5. Foods and beverages/Hygiene	6
3. Materials	6
3.1. Bürkert resistApp	6
4. Dimensions	6
4.1. Metal T-fitting for measuring device with G 2" process connection	6
Internal thread connection	6
External thread connection	7
Weld spigot connection	8
Clamp connection	9
Flange connection	9
4.2. Plastic T-fitting for measuring device with G 2" process connection	10
True union connection with nut and solvent/fusion socket	10
External thread connection	10
Solvent/fusion spigot connection	11
4.3. Straight connection for measuring device with G 2" process connection	12
Weld spigot connection without radius	12
Weld spigot connection with radius	12
Fusion spigot connection	13
Screw-on spigot connection	14
4.4. Saddle for flowmeter with G 2" process connection.....	14
4.5. Measuring chamber for analysis measuring device with G 2" process connection	15
4.6. T-fitting for flowmeter with clamp process connection.....	15
Weld spigot connection	15
4.7. Straight connection for flowmeter with clamp process connection	16
Weld spigot connection	16
5. Performance specifications	16
5.1. Pressure temperature diagram	16
6. Product installation	17
6.1. Installation notes	17
Flow measurement	17
Analysis measurement.....	17
6.2. Selection of the nominal diameter	18
7. Product accessories	19
8. Networking and combination with other Bürkert products	20
8.1. Networking and combination of the device.....	20
Fitting for measuring device with G 2" process connection	20
Fitting for flowmeter with clamp process connection.....	21
8.2. Combination of the Type S020 with a measuring device for flow rate, pH or ORP, conductivity measurement	22

9. Ordering information	22
9.1. Bürkert eShop	22
9.2. Bürkert product filter	22
9.3. Ordering chart	23
Metal T-fitting DN 06...DN 65 for measuring device with G 2" process connection.....	23
Plastic T-fitting DN 06...DN 65 for measuring device with G 2" process connection	24
Straight connection for measuring device with G 2" process connection	25
Weld/fusion spigot connection.....	25
Saddle for flowmeter with G 2" process connection.....	25
Measuring chamber for analysis measuring device with G 2" process connection.....	25
T-fitting DN 32...DN 100 for flowmeter Type 8041/8045 with clamp process connection	25
Straight connection DN 32...DN 100 for flowmeter Type 8041/8045 with clamp process connection	26
9.4. Ordering chart accessories.....	26
Accessories for all variants	26
Accessories for fitting for measuring device with G 2" process connection	26
Accessories for fitting for flowmeter Type 8041/8045 with clamp process connection	27

1. General technical data

Product properties

Material

Make sure the device materials are compatible with the fluid you are using.

Further information can be found in chapter [“3.1. Bürkert resistApp” on page 6.](#)

Non-wetted parts

Screw Stainless steel (316L - 1.4404)

Wetted parts

Fitting body

- For G 2" flowmeter connection: Body and adapter respectively in brass (CuZn₃₉Pb₂) and stainless steel (316L - 1.4404) or all in stainless steel (316L - 1.4404), PVC, PP, PVDF or PE (depending on the fitting variant Type S020)
- For clamp flowmeter connection: Stainless steel 316L

Seal

- For G 2" flowmeter connection: FKM or EPDM (depending on the fitting variant Type S020)
- For clamp flowmeter connection: none

Surface quality

For fitting in stainless steel:

- For G 2" flowmeter connection
 - T-fitting
 - inner surface: Ra < 1.6 µm
 - outer surface: Ra < 3.2 µm
 - Straight connection and measuring chamber
 - inner surface: Ra < 1.6 µm
 - outer surface: Ra < 6.3 µm
- For clamp flowmeter connection
 - T-fitting
 - inner surface: Ra < 0.8 µm (excluding welding seams)
 - outer surface: Ra < 1.6 µm
 - Straight connection
 - inner surface: Ra < 0.6 µm
 - outer surface: Ra < 1.2 µm

Compatibility With flowmeters Type 8020, 8025, 8026, 8041, 8045 or analysis measuring devices Type 8200/8203, 8220 or 8228

Pipe diameter

- For G 2" flowmeter connection: DN 06...DN 400
Combination between fitting and measuring device is sometimes restricted to some DN. Further information can be found in chapter [“8.2. Combination of the Type S020 with a measuring device for flow rate, pH or ORP, conductivity measurement” on page 22.](#))
- For clamp flowmeter connection: DN 32...DN 100

Dimensions Further information can be found in chapter [“4. Dimensions” on page 6.](#)

Medium data

Fluid temperature¹⁾

For fitting in:

- PVC: 0...+ 50 °C (+ 32...+ 122 °F)
- PP: 0...+ 80 °C (+ 32...+ 176 °F)
- PVDF: - 15...+ 100 °C (+ 5...+ 212 °F)
- PE: + 5...+ 70 °C (+ 41...+ 158 °F)
- stainless steel, brass: - 15...+ 160 °C (+ 5...+ 320 °F)

Fluid pressure¹⁾

For fitting in:

- plastic: max. PN 10
- metal: max. PN 16

Further information can be found in chapter [“5.1. Pressure temperature diagram” on page 16.](#)

Product connections

Measuring devices connection G 2" or clamp connection

Pipe connection

For fitting in:

- plastic: true union with nut and solvent/fusion socket, spigot or external thread, saddle
- metal: internal or external thread, weld ends, clamp or flange

Approvals and conformities

Directives

CE directive	Further information on the CE directive can be found in chapter "2.3. Standards" on page 5.
Pressure equipment directive	Complying with article 4, paragraph 1 of 2014/68/EU directive Further information on the pressure equipment directive can be found in chapter "2.4. Pressure Equipment Directive (PED)" on page 5.
Foods and beverages/Hygiene	FDA declaration of conformity (stainless steel fitting only with EPDM seal) Must be ordered separately. Further information can be found in chapter "Accessories for all variants" on page 26.
Materials	- Inspection certificate 3.1 (according to EN-ISO 10204) - Certification of Conformity for the surface Quality (according to DIN4762, DIN4768, ISO/4287/1) Must be ordered separately. Further information can be found in chapter "Accessories for all variants" on page 26.
Others	3 points flow calibration certificate - Test report 2.2 (according to EN-ISO 10204) Must be ordered separately. Further information can be found in chapter "Accessories for all variants" on page 26.

Environment and installation

Ambient temperature	Operation and storage: the temperature limits also depend on the temperature limits of the inserted device, see the relevant data sheet or operating instructions for more information
---------------------	--

1.) The temperature and pressure limits also depend on the temperature or pressure limits of the inserted device, see the relevant data sheet or operating instructions for more information. If the specified temperature or pressure ranges for the fitting and the inserted device are different, use the most restrictive range.

2. Approvals and conformities

2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants of the device can be supplied with the below mentioned approvals or conformities.

2.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

2.4. Pressure Equipment Directive (PED)

The device conforms to article 4, paragraph 1 of the Pressure Equipment Directive (PED) 2014/68/EU under the following conditions:

Device used on a pipe

Note:

- The data in the table is independent of the chemical compatibility of the material and the fluid.
- PS = maximum admissible pressure (in bar), DN = nominal diameter of the pipe

Type of fluid	Conditions
Fluid group 1, article 4, paragraph 1.c.i	DN ≤ 25
Fluid group 2, article 4, paragraph 1.c.i	DN ≤ 32 or PS*DN ≤ 1000
Fluid group 1, article 4, paragraph 1.c.ii	DN ≤ 25 or PS*DN ≤ 2000
Fluid group 2, article 4, paragraph 1.c.ii	DN ≤ 200 or PS ≤ 10 or PS*DN ≤ 5000

2.5. Foods and beverages/Hygiene

Conformity	Description
FDA	FDA – Code of Federal Regulations The variants with the housing made of stainless steel materials and the seal made of EPDM materials are compliant in their composition with the Code of Federal Regulations published by the FDA (Food and Drug Administration, USA) according to the manufacturer's declaration.

3. Materials

3.1. Bürkert resistApp



Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

4. Dimensions


4.1. Metal T-fitting for measuring device with G 2" process connection

Internal thread connection

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Suitable from DN 32 for use with an analysis measuring device

According to G, NPT or Rc in stainless steel (316L - 1.4404) and/or brass (CuZn₃₉Pb₂)

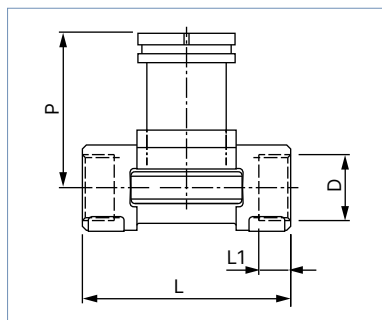


DN	P	L	L1	D
				[inch]
15	80.3	84.0	16.0	G ½
			17.0	NPT ½
			15.0	Rc ½
20	77.8	94.0	17.0	G ¾
			18.3	NPT ¾
			16.3	Rc ¾
25	78.0	104.0	23.5	G 1
			18.0	NPT 1
			18.0	Rc 1
32	81.6	119.0	23.5	G 1 ¼
			21.0	NPT 1 ¼
			21.0	Rc 1 ¼
40	85.4	129.0	23.5	G 1 ½
			20.0	NPT 1 ½
			19.0	Rc 1 ½
50	91.5	148.5	27.5	G 2
			24.0	NPT 2
			24.0	Rc 2

External thread connection

Note:


- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Suitable from DN 32 for use with an analysis measuring device

According to G in stainless steel (316L - 1.4404) and/or brass (CuZn₃₉Pb₂) or PVC (only DN 06 and DN 08)

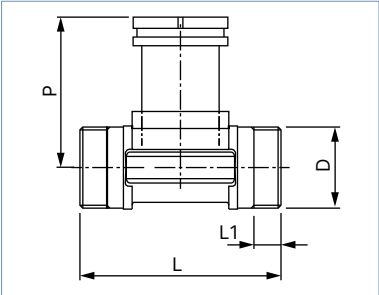

DN	P	L	L1	D	
				[Inch]	[mm]
06	75.3	90.0	14.0	G ½	–
08	75.3	90.0	14.0	G ½	–
15	80.3	84.0	11.5	G ¾	–
20	77.8	94.0	13.5	G 1	–
25	78.0	104.0	14.0	G 1¼	–
32	81.6	119.0	18.0	G 1½	–
40	85.4	129.0	19.0	–	M55 × 2
50	91.5	148.5	20.0	–	M64 × 2

According to SMS 1145 in stainless steel (316L - 1.4404)

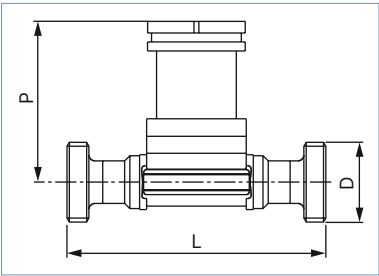


DN	P	L	D
25	77.8	130	Rd 40 x 1/6"
40	81.6	164	Rd 60 x 1/6"
50	85.4	173	Rd 70 x 1/6"

Weld spigot connection
Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Suitable from DN 32 for use with an analysis measuring device

According to EN ISO 1127/ISO 4200/DIN 11866 series B, SMS 3008 or BS 4825-1/ASME BPE/DIN 11866 series C in stainless steel (316L - 1.4404)

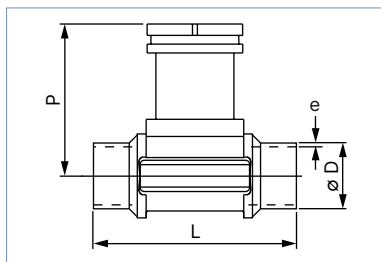


DN	P	Standard	L	ØD	e
15	80.3	EN ISO 1127/ISO 4200/DIN 11866 Series B	84.0	21.30	1.60
	–	SMS 3008	–	–	–
	–	ASME BPE/DIN 11866 Series C	–	–	–
20	77.8	EN ISO 1127/ISO 4200/DIN 11866 Series B	94.0	26.9	1.60
	–	SMS 3008	–	–	–
	83.3	ASME BPE/DIN 11866 Series C	84.0	19.05	1.65
25	78.0	EN ISO 1127/ISO 4200/DIN 11866 Series B	104.0	33.70	2.00
	77.8	SMS 3008	94.0	25.00	1.20
	77.8	BS 4825-1/ASME BPE/DIN 11866 Series C	94.0	25.40	1.65
32	81.6	EN ISO 1127/ISO 4200/DIN 11866 Series B	119.0	42.40	2.00
	–	SMS 3008	–	–	–
	78.0	BS 4825-1/ASME BPE/DIN 11866 Series C	104.0	32.00	1.65
40	85.4	EN ISO 1127/ISO 4200/DIN 11866 Series B	129.0	48.30	2.00
	81.6	SMS 3008	119.0	38.00	1.20
	81.6	BS 4825-1/ASME BPE/DIN 11866 Series C	119.0	38.10	1.65
50	91.5	EN ISO 1127/ISO 4200/DIN 11866 Series B	148.5	60.30	2.60
	85.4	SMS 3008	128.0	51.00	1.20
	85.4	BS 4825-1/ASME BPE/DIN 11866 Series C	128.0	50.80	1.65
65	–	EN ISO 1127/ISO 4200/DIN 11866 Series B	–	–	–
	91.5	SMS 3008	147.0	63.50	1.60
	91.5	BS 4825-1/ASME BPE/DIN 11866 Series C	147.0	63.50	1.65

Clamp connection

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Suitable from DN 32 for use with an analysis measuring device

According to DIN 32676 series B, SMS 3017 or BS 4825-3/ASME BPE in stainless steel (316L - 1.4404)

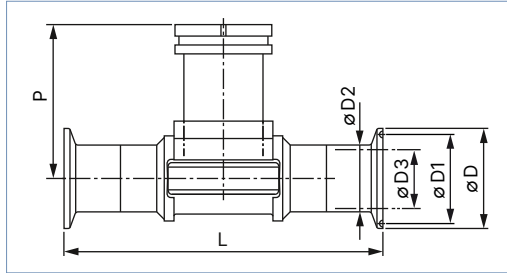

DN	P	Standard	L	ØD	ØD1	ØD2	ØD3
15	80.3	DIN 32676 Series B ¹⁾	130	34.0	27.5	21.30	18.10
	–	SMS 3017	–	–	–	–	–
	–	ASME BPE	–	–	–	–	–
20	77.8	DIN 32676 Series B	150	50.5	43.5	26.90	23.70
	–	SMS 3017	–	–	–	–	–
	80.3	ASME BPE	119	25.0	19.6	19.05	15.75
25	78.0	DIN 32676 Series B	160	50.5	43.5	33.70	29.70
	77.8	SMS 3017	129	50.5	43.5	25.00	22.60
	77.8	BS 4825-3/ASME BPE	129	50.5	43.5	25.40	22.10
32	81.6	DIN 32676 Series B	180	50.5	43.5	42.40	38.40
	–	SMS 3017	–	–	–	–	–
	–	BS 4825-3/ASME BPE	–	–	–	–	–
40	85.4	DIN 32676 Series B	200	64.0	56.5	48.30	44.30
	81.6	SMS 3017	161	50.5	43.5	38.00	35.60
	81.6	BS 4825-3/ASME BPE	161	50.5	43.5	38.10	34.80
50	91.5	DIN 32676 Series B	230	77.5	70.5	60.30	55.10
	85.4	SMS 3017	192	64.0	56.5	51.00	48.60
	85.4	BS 4825-3/ASME BPE	192	64.0	56.5	50.80	47.50
65	–	DIN 32676 Series B	–	–	–	–	–
	91.5	SMS 3017	216	77.5	70.5	63.50	60.30
	91.5	BS 4825-3/ASME BPE	216	77.5	70.5	63.50	60.20


1.) Similar to DIN 32676 series B but with 34.0 mm clamp connection

Flange connection

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Suitable from DN 32 for use with an analysis measuring device

According to EN1092-1/B1/PN 16 or ANSI B16-5 in stainless steel (316L - 1.4404)

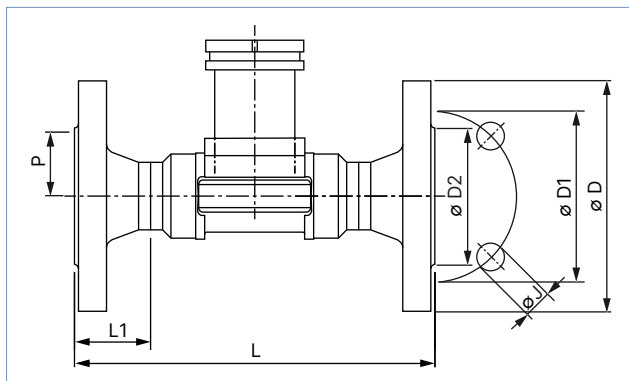

DN	P	Standard	L	L1	ØD	ØD1	ØD2	ØJ
15	80.3	EN	130	23.5	95.0	65.0	45.0	4 × 14.0
		ANSI	130		89.0	60.3	34.9	4 × 15.8
20	77.8	EN	150	28.5	105.0	75.0	58.0	4 × 14.0
		ANSI	150		99.0	69.8	42.9	4 × 15.8
25	78.0	EN	160	28.5	115.0	85.0	68.0	4 × 14.0
		ANSI	160		108.0	79.4	50.8	4 × 15.8
32	81.6	EN	180	31.0	140.0	100.0	78.0	4 × 18.0
		ANSI	180		117.0	88.9	63.5	4 × 15.8
40	85.4	EN	200	36.0	150.0	110.0	88.0	4 × 18.0
		ANSI	200		127.0	98.4	73.0	4 × 15.8
50	91.5	EN	230	41.0	165.0	125.0	102.0	4 × 18.0
		ANSI	230		152.0	120.6	92.1	4 × 19.0


4.2. Plastic T-fitting for measuring device with G 2" process connection

True union connection with nut and solvent/fusion socket

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Suitable for use with an analysis measuring device. Note that the fittings DN 15...DN 25 to be used for the analysis measurement differ from those for the flow measurement.

According to DIN 8063, ASTM D 1785/76 or JIS K in PVC, DIN 16962 in PP or ISO 10931 in PVDF

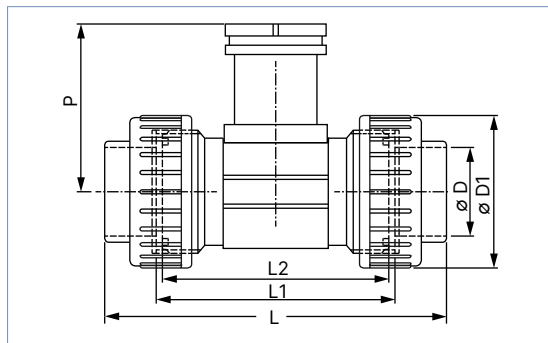

DN	P	Standard	L	L1	L2	ØD	ØD1
15	80.4	DIN/ISO	128.0	96	90	20.00	43
		ASTM	130.0			21.30	
		JIS	129.0			18.40	
15 ^{1.)}	81.4	DIN/ISO	148.0	116	110	20.00	74
20	77.8	DIN/ISO	144.0	106	100	25.00	53
		ASTM	145.6			26.70	
		JIS	145.0			26.45	
20 ^{1.)}	81.4	DIN/ISO	154.0	116	110	25.00	74
25	78.0	DIN/ISO	160.0	116	110	32.00	60
		ASTM	161.4			33.40	
		JIS	161.0			32.55	
25 ^{1.)}	81.4	DIN/ISO	160.0	116	110	32.00	74
32	81.4	DIN/ISO	168.0	116	110	40.00	74
		ASTM	170.0			42.20	
		JIS	169.0			38.60	
40	85.2	DIN/ISO	188.0	127	120	50.00	83
		ASTM	190.2			48.30	
		JIS	190.0			48.70	
50	91.5	DIN/ISO	212.0	136	130	63.00	103
		ASTM	213.6			60.30	
		JIS	213.0			60.80	


1.) Fitting for analysis measurement

External thread connection

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Not suitable for use with an analysis measuring device

According to G in PVC (only DN 06 and DN 08)

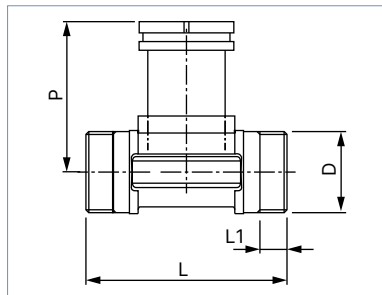


DN	P	L	L1	D
				[Inch]
06	75.3	90.0	14.0	G ½
08	75.3	90.0	14.0	G ½

Solvent/fusion spigot connection

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor
- Suitable from DN 32 for use with an analysis measuring device

According to DIN 8063 in PVC, DIN 16962 in PP or ISO 10931 in PVDF

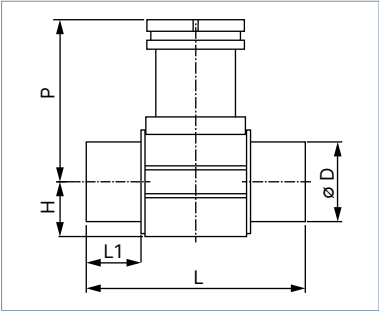

DN	P	Standard	H	L	L1	ØD
15	80.4	DIN 8063	17.5	90	16.5	20
		DIN 16962		85	14.0	
		DIN 10931		85	14.0	
20	77.8	DIN 8063	17.5	100	20.0	25
		DIN 16962		92	16.0	
		DIN 10931		92	16.0	
25	78.0	DIN 8063	21.5	110	23.0	32
		DIN 16962		95	18.0	
		DIN 10931		95	18.0	
32	81.4	DIN 8063	27.5	110	27.5	40
		DIN 16962		100	20.0	
		DIN 10931		100	20.0	
40	85.2	DIN 8063	31.5	120	30.0	50
		DIN 16962		106	23.0	
		DIN 10931		106	23.0	
50	91.5	DIN 8063	39.5	130	37.0	63
		DIN 16962		110	27.0	
		DIN 10931		110	27.0	


4.3. Straight connection for measuring device with G 2" process connection

Weld spigot connection without radius

Note:

- Dimensions in mm, unless otherwise stated
- Only suitable for mounting analysis measuring devices on various tanks

In stainless steel (316L - 1.4404)

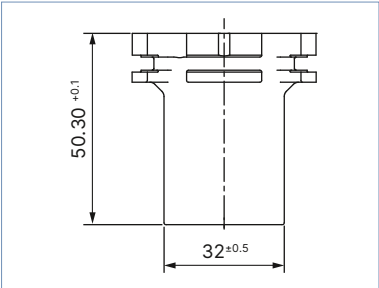


Weld spigot connection with radius

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor for DN 50...DN 200 and with long sensor for DN 250...DN 350
- Only suitable from DN 50...DN 200 for use with an analysis measuring device

In stainless steel (316L - 1.4404)

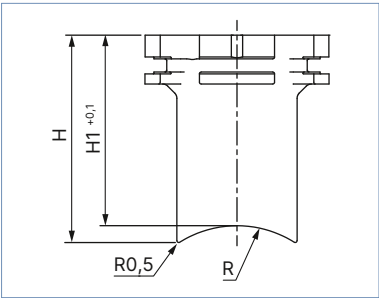


DN	H	H1	R
50	61.6	56.6	30.2
65	58.6	54.5	36.7
80	56.4	53.1	44.5
100	53.2	50.7	57.2
125	50.3	48.2	70.7
150	47.4	45.7	84.2
200	42.3	41.0	109.6
250	74.7	73.6	136.6
300	68.7	67.8	162.0
350	64.7	63.9	177.8

Fusion spigot connection

Note:

- Dimensions in mm, unless otherwise stated
- For use with a flowmeter with short sensor for DN 65...DN 100 and with long sensor for DN 125...DN 400
- Only suitable for DN 65...DN 100 for use with an analysis measuring device

In PE, PP or PVDF

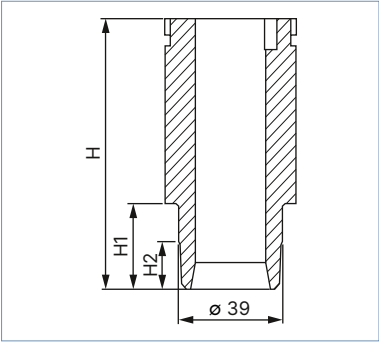


DN	H	Materials	H1	H2
65	72.5	PE	13.0	–
		PP	13.0	–
		PVDF	10.4	–
80	72.5	PE	15.6	–
		PP	15.6	–
		PVDF	12.5	–
100	72.5	PE	19.0	5.0
		PP	19.0	5.0
		PVDF	15.2	6.0
125	102.0	PE	24.2	8.0
		PP	–	–
		PVDF	–	–
150	102.0	PE	27.7	10.0
		PP	27.7	10.0
		PVDF	–	–
200	102.0	PE	38.9	16.0
		PP	38.9	16.0
		PVDF	–	–
250	102.0	PE	48.4	21.0
		PP	48.4	21.0
		PVDF	–	–
300	102.0	PE	54.5	24.0
		PP	54.5	24.0
		PVDF	–	–
350	102.0	PE	61.3	28.0
		PP	61.3	28.0
		PVDF	–	–
400	102.0	PE	69.1	31.5
		PP	–	–
		PVDF	–	–

Screw-on spigot connection

Note:

- Dimensions in mm, unless otherwise stated
- Only for use with a flowmeter with long sensor

In PVC, PP, PE

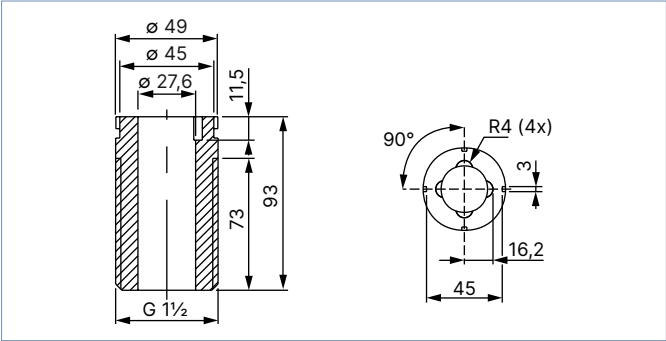


4.4. Saddle for flowmeter with G 2" process connection

Note:

- Dimensions in mm, unless otherwise stated
- Only for use with a flowmeter with long sensor

Body and adapter in PP, seal in EPDM, reinforcing ring in stainless steel

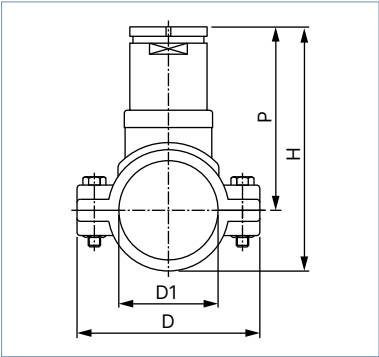


DN	P	H	D	D1
50	116.0	155	116	63
65	115.0	160	129	75
80	119.0	171	144	90
100	124.0	187	166	110
110	120.0	191	181	125
125	127.0	205	196	140
150	137.0	225	216	160
180	161.0	271	266	200
200	173.0	291	290	225

4.5. Measuring chamber for analysis measuring device with G 2" process connection

Note:

Dimensions in mm, unless otherwise stated

In stainless steel 316L - 1.4404, G 1/2" pipe connection

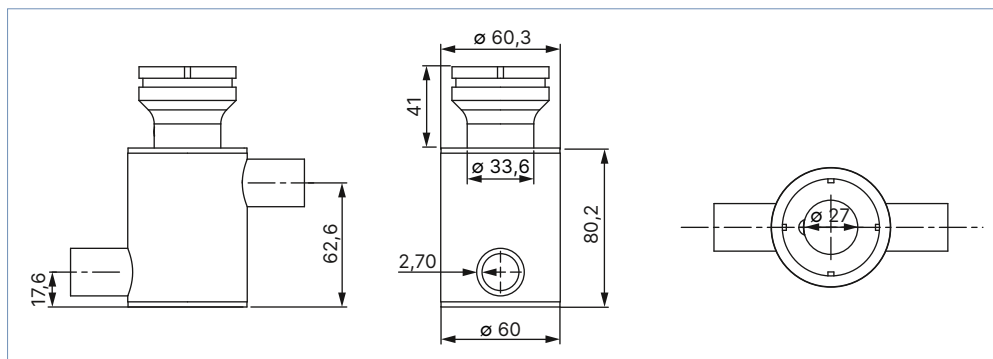


4.6. T-fitting for flowmeter with clamp process connection

Weld spigot connection
Note:

Dimensions in mm, unless otherwise stated

According to SMS 3008, BS 4825-1/ASME BPE/DIN 11866 Series C or DIN 11850 Series 2/DIN 11866 Series A/DIN EN 10357 Series A in stainless steel 316L

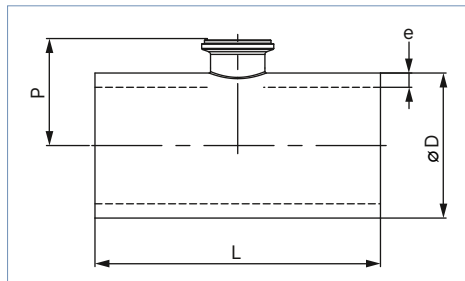

DN	P	Standard	L	ØD	e
40	42.5	SMS 3008	140.0	38.0	1.20
	43.7	ASME BPE/DIN 11866 Series C	120.6	38.1	1.65
	44.3	DIN 11850 Series 2/DIN 11866 Series A/ DIN EN 10357 Series A	120.0	41.0	1.50
50	49.3	SMS 3008	164.0	51.0	1.20
	50.6	BS 4825-1/ASME BPE/DIN 11866 Series C	146.0	50.8	1.65
	50.8	DIN 11850 Series 2/DIN 11866 Series A/ DIN EN 10357 Series A	160.0	53.0	2.00
65	54.4	SMS 3008	210.0	63.5	1.60
	55.4	BS 4825-1/ASME BPE/DIN 11866 Series C	158.8	63.5	1.65
	59.6	DIN 11850 Series 2/DIN 11866 Series A/ DIN EN 10357 Series A	210.0	70.0	2.00
80	60.7	SMS 3008	220.0	76.1	1.60
	62.0	BS 4825-1/ASME BPE/DIN 11866 Series C	171.5	76.2	1.65
	67.3	DIN 11850 Series 2/DIN 11866 Series A/ DIN EN 10357 Series A	260.0	85.0	2.00
100	73.8	BS 4825-1/ASME BPE/DIN 11866 Series C	209.6	101.6	2.11
	77.1	DIN 11850 Series 2/DIN 11866 Series A/ DIN EN 10357 Series A	310.0	104.0	2.00


4.7. Straight connection for flowmeter with clamp process connection

Weld spigot connection

Note:


Dimensions in mm, unless otherwise stated

According to SMS 3008, DIN 11850 Series 2/DIN 11866 Series A/DIN EN 10357 Series A in stainless steel 316L



DN	Standard	H	S	D2
40	SMS 3008	21.7	1.2	38
	DIN 11850 Series 2/DIN 11866 Series A/DIN EN 10357 Series A	21.7	1.5	41
50	SMS 3008	21.7	1.2	38
	DIN 11850 Series 2/DIN 11866 Series A/DIN EN 10357 Series A	21.7	1.5	41
65	SMS 3008	19.7	1.2	38
	DIN 11850 Series 2/DIN 11866 Series A/DIN EN 10357 Series A	21.7	1.5	41
80	SMS 3008	19.7	1.2	38
	DIN 11850 Series 2/DIN 11866 Series A/DIN EN 10357 Series A	21.7	1.5	41
100	DIN 11850 Series 2/DIN 11866 Series A/DIN EN 10357 Series A	19.7	1.5	41


According to BS 4825-1/ASME BPE/DIN 11866 Series C in stainless steel 316L



DN	Standard	H	S	D2
40	ASME BPE/DIN 11866 Series C	23.7	1.65	38.1
50	BS 4825-1/ASME BPE/DIN 11866 Series C	23.7	1.65	38.1
65	BS 4825-1/ASME BPE/DIN 11866 Series C	19.7	1.65	38.1
80	BS 4825-1/ASME BPE/DIN 11866 Series C	19.7	1.65	38.1
100	BS 4825-1/ASME BPE/DIN 11866 Series C	19.7	1.65	38.1

5. Performance specifications

5.1. Pressure temperature diagram

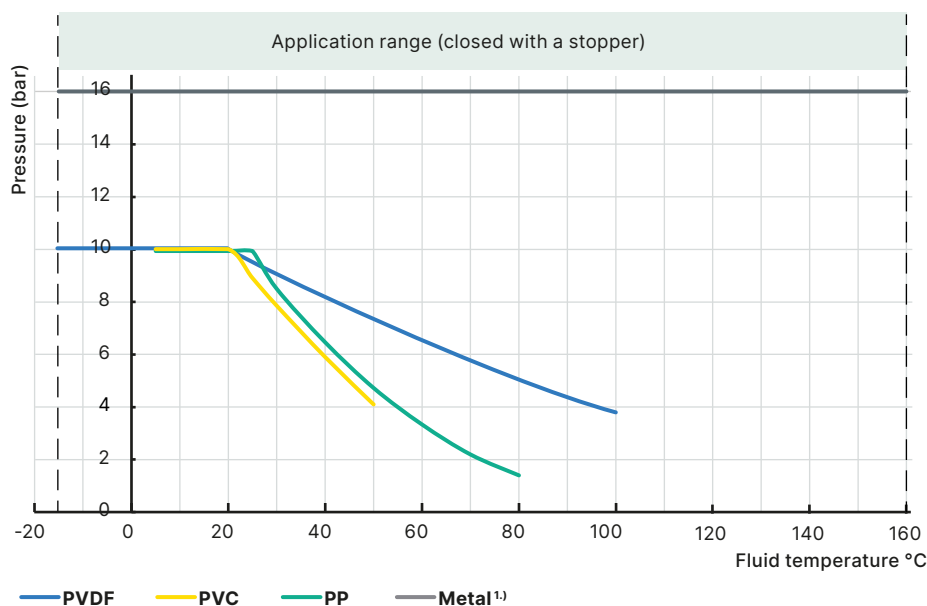

1.) Excepted fitting DN 100 (-15...+160 °C, PN 10) with clamp measuring device connection

6. Product installation

6.1. Installation notes

Flow measurement


Note:

The fitting combined with a measuring device is not suitable for use in gaseous media and steam.

Minimum straight distances upstream and downstream of the sensor must be observed. These stabilizing distances depend on the pipe's design. Increasing these distances or installing a flow conditioner may be necessary to obtain the best accuracy. For more information, refer to EN ISO 5167-1.

EN ISO 5167-1 specifies the straight inlet and outlet distances that must be complied with when installing fittings in pipe lines in order to achieve calm flow conditions. The most commonly used elements that could lead to turbulence in the flow are shown below. The related minimum inlet and outlet distances that ensure a calm flow are also specified.

Make sure that the measuring conditions at the point of measurement are calm and problem-free.

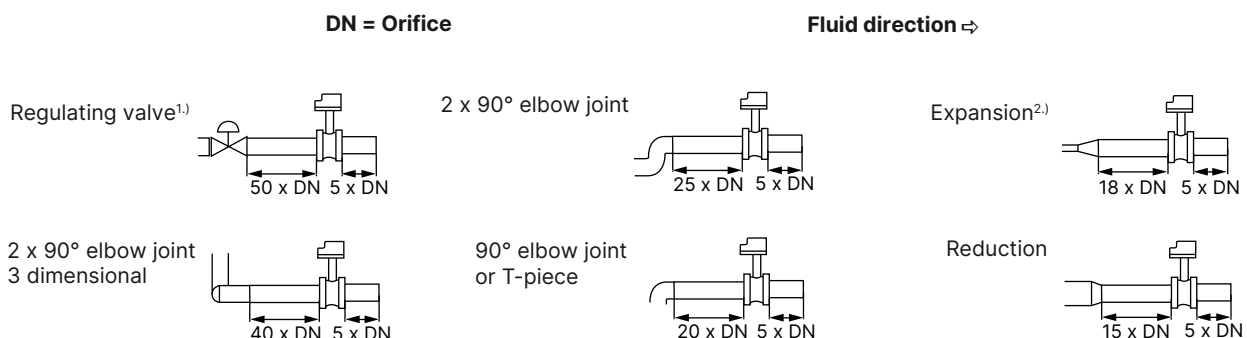


1.) If the valve cannot be mounted after the measuring device, the minimal distances have to be respected.

2.) If an expansion cannot be avoided, the minimal distances have to be respected.
Please note minimum flow velocity

The complete measuring device can be installed in either horizontal or vertical pipes, but following additional conditions should be respected:


- The pipe always has to be filled with fluid at all times near the device.
- The pipe design must be such that no air bubbles or cavitation can form within the medium near the device at any time.

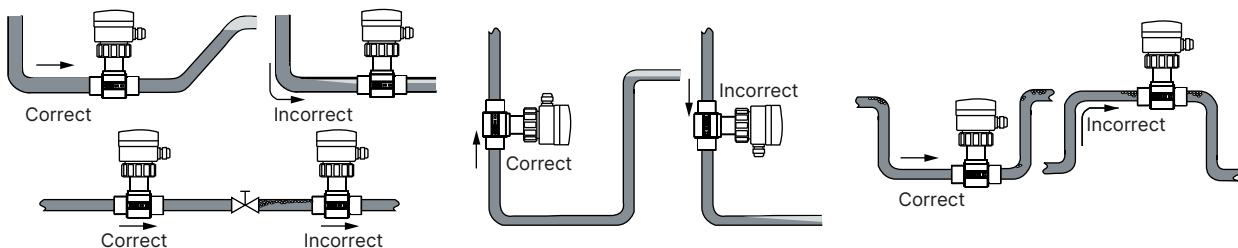

Pressure and temperature ratings must be respected according to the selected fitting material. The suitable pipe size is selected using the diagram in the chapter "Nominal size selection" of the fitting, see chapter **"6.2. Selection of the nominal diameter"** on page 18.

Analysis measurement

For these analysis measurements, we recommended a "U"-form bypass installation to ensure that the sensor does not dry out and can also be calibrated without stopping the whole process or to use the special designed measuring chamber.

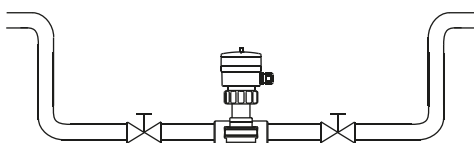

The specially designed measuring chamber enables to install all pH, ORP, conductivity measuring devices in all pipe systems, either directly in the main flow or in a by-pass line. Additionally, the electrode is always kept wet and is easily isolated from the main flow for calibration purposes.

6.2. Selection of the nominal diameter

The following graph is used to determine the appropriate DN of the pipe and fitting for the application, according to the fluid velocity and the flow rate. On the chart, the intersection of flow velocity and flow rate gives the appropriate diameter.

Note:


- For the fittings listed below, the corresponding nominal size in the bracket must be used:
 - External threads acc. to SMS 1145
 - Weld ends acc. to SMS 3008, BS4825-1/ASME BPE/DIN 11866 series C or DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series A
 - Clamp acc. to SMS 3017, BS 4825-3/ASME BPE or DIN 32676 series A.
- For all other fittings, the corresponding nominal diameter without bracket applies.

Example 1:

- Nominal flow: 10 m³/h
 - Optimal flow rate: 2...3 m/s
- Result: Select a pipe size of DN 40

Example 2 with external threads acc. to SMS 1145:

- Nominal flow: 10 m³/h
 - Optimal flow rate: 2...3 m/s
- Result: Select a pipe size of DN 50

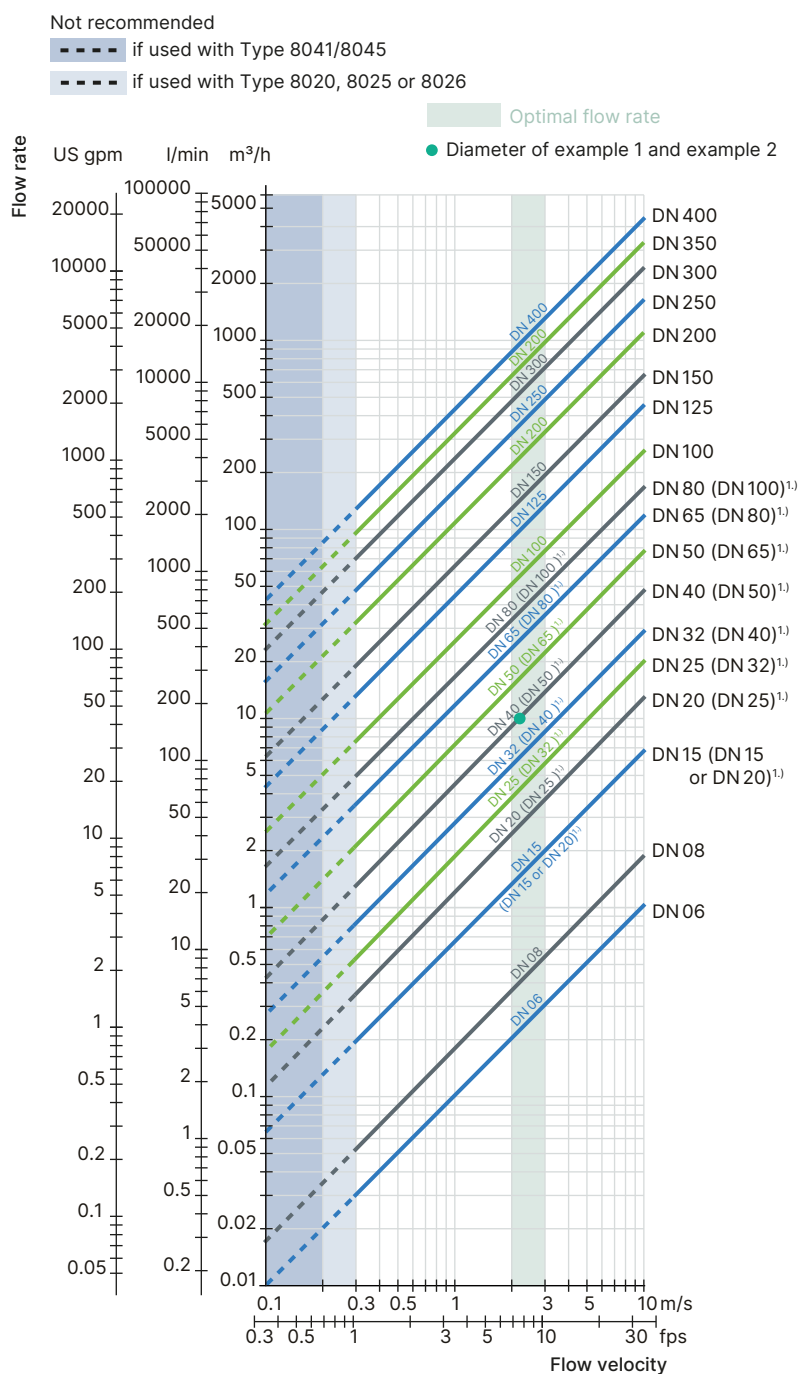

1.) See note at the beginning of this chapter.

7. Product accessories


Note:
Since March 2012, the Type S020 fittings in DN 15 and DN 20 have been available in 2 variants with different K factors. Further information can be found in the user manual in the K factor chapter, see **Type S020 ▶**.


The 2nd variant is identified by the “v2” marking. This “v2” marking can be found:

- on the bottom of the DN 15 or DN 20 fitting in plastic



- on the side of the DN 15 or DN 20 fitting in metal



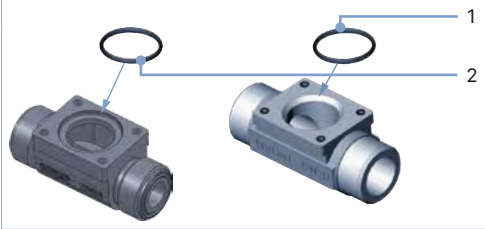Accessory	No.	Description
	1	O-ring seal for metal fitting
	2	O-ring seal ¹⁾ for plastic fitting

1.) The O-ring is only intended for fitting body with flat bottom groove. The O-ring is not suitable for fitting body with ribbed groove (old variant).

8. Networking and combination with other Bürkert products

8.1. Networking and combination of the device

Fitting for measuring device with G 2" process connection


Example:



Flowmeter				
				
Type 8020 ▶ Insertion flowmeter with paddle wheel	Type 8025 ▶ Insertion flowmeter or batch controller with paddle wheel	Type 8026 ▶ Insertion flowmeter with paddle wheel, ELEMENT design	Type 8041 ▶ Magnetic inductive Insertion flowmeter	Type 8045 ▶ Magnetic inductive Insertion flowmeter
Analysis measuring device				
				
Type 8200 ▶ + Type 8203 ▶ Armatures and pH- or ORP probes	Type 8220 ▶ Conductivity sensor	Type 8228 ▶ Conductivity sensor, ELEMENT design		
				
Transmitter				
				
Type 8619 ▶ multiCELL - transmitter/controller	Type 8025 ▶ Flow transmitter (only for flowmeter)	Type 8611 ▶ eCONTROL - Universal controller panel, wall or rail-mounting variant		

Fitting for flowmeter with clamp process connection

Example:

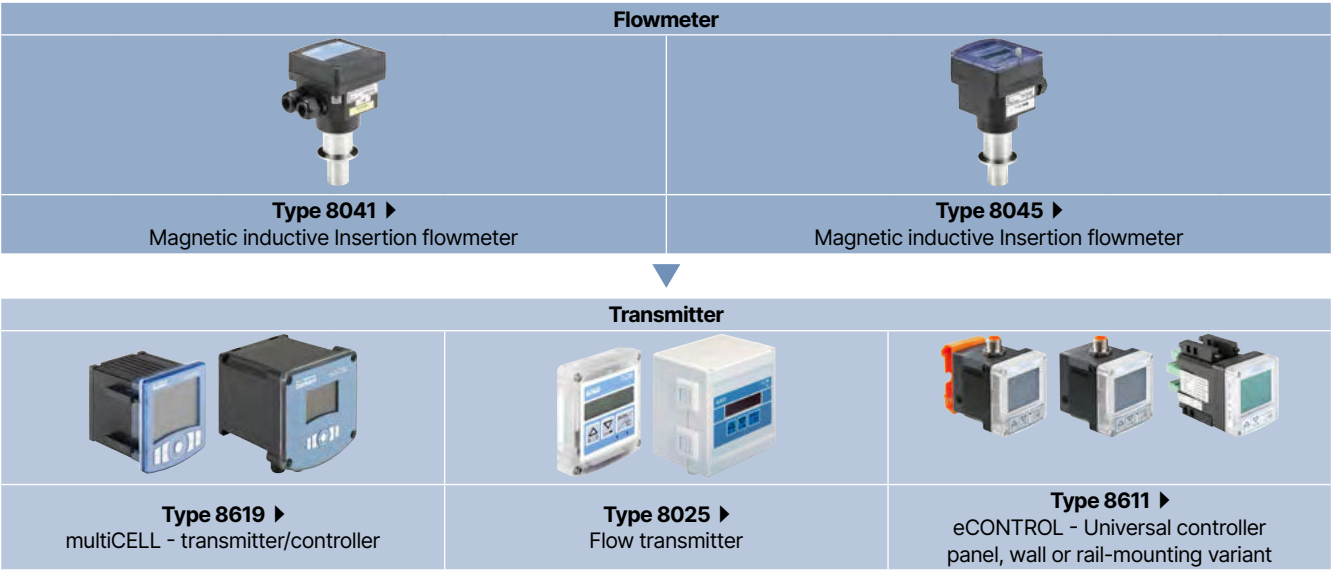

8.2. Combination of the Type S020 with a measuring device for flow rate, pH or ORP, conductivity measurement

For device with G 2" connection		DN 06	DN 32	DN 50	DN 65	DN 100	DN 200	DN 350	DN 400
Available Type S020 fittings DN	T-fitting 								
	Welding socket 								
	Fusion spigot 								
	Screw-on spigot 								
	Saddle 								
For device with clamp connection									
Device for	T-fitting or welding socket 								
Flow rate measurement									
Type 8020, 8025, 8026, 8041 and 8045 with G 2" process connection									
Type 8041 and 8045 with clamp process connection									
Analytical measurement									
pH or ORP: Type 8200/8203									
Conductivity: Type 8220, 8228									

1.) DN 20 fittings according to the following standards cannot be used with flowmeters Type 8020, Type 8025 and Type 8026.

DN 32 fittings according to the following standards cannot be used with analysis measuring devices Type 8200/8203, Type 8220 and Type 8228.

Standards: fittings with external threads according to SMS 1145, weld ends according to SMS 3008, BS 4825-1/ASME BPE/DIN 11866 series C or DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series A, Clamp according to SMS 3017, BS 4825-3/ASME BPE, DIN 32676 series A.

2.) See the note for the use of the fitting in chapter "4. Dimensions" on page 6

3.) Only use plastic fittings with true union process connection in analysis variant, with nut and solvent/fusion socket according to DIN 8063 (PVC), to DIN 16962 (PP) or to ISO 10931 (PVDF), other materials are available on request.

For further details about the various combination possibilities (measuring device and fitting), **consult the measuring device related data sheet.**

9. Ordering information

9.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

9.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

9.3. Ordering chart

Metal T-fitting DN 06...DN 65 for measuring device with G 2" process connection

Standard	Article no.								
	DN 06 - 1/2"	DN 08 - 1/2"	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65
Brass body and stainless steel adapter - Fluid temperature max. 160 °C, PN 16									
FKM seal									
Internal thread connection									
G	–	–	428712 	428713 	428714 	428715 	428716 	428717 	–
NPT	–	–	428718 	428719 	428720 	428721 	428722 	428723 	–
Rc	–	–	428724 	428725 	428726 	428727 	428728 	428729 	–
External thread connection									
G	–	–	428730 	428731 	428732 	428733 	428734 	428735 	–
Stainless steel body and stainless steel adapter - Fluid temperature max. 160 °C, PN 16									
FKM seal									
Internal thread connection									
G	–	–	428736 	428737 	428738 	428739 	428740 	428741 	–
NPT	–	–	428742 	428743 	428744 	428745 	428746 	428747 	–
Rc	–	–	428748 	428749 	428750 	428751 	428752 	428753 	–
External thread connection									
G	552434 	552432 	428754 	428755 	428756 	428757 	428758 	428759 	–
Weld spigot connection									
EN ISO 1127/ISO 4200/ DIN 11866 series B	–	–	428760 	428761 	428762 	428763 	428764 	428765 	–
Clamp connection									
DIN 32676 series B	–	–	428766  1.)	428767 	428768 	428769 	428770 	428771 	–
Flange connection									
EN 1092-1/B1/PN 16	–	–	428772 	428773 	428774 	428775 	428776 	428777 	–
ANSI B16- 5	–	–	428778 	428779 	428780 	428781 	428782 	428783 	–
EPDM seal									
External thread connection									
SMS 1145	–	–	–	–	443317 	–	443318 	443319 	–
Weld spigot connection									
SMS 3008	–	–	–	–	443309 	–	443310 	443311 	443944  3.)
BS 4825-1/ASME BPE/ DIN 11866 series C	–	–	–	443734  2.)	443735 	443736 	443942 	443943 	443944 
Clamp connection									
SMS 3017	–	–	–	–	443313 	–	443314 	443315 	443969  3.)
BS 4825-3/ ASME BPE	–	–	–	443965  2.)	443966 	–	443967 	443968 	443969 

1.) Refer to clamp with D dimensions of 34 mm (see chapter "Clamp connection" on page 9)

2.) DN 20 (3/4") only available in ASME BPE

3.) Refer to ASME BPE

Further variants on request



Process connection

- Weld spigot connection according to DIN 11850 series 2/DIN 11866 series A/ DIN EN 10357 series A
- Clamp according to DIN 32676 series A

Plastic T-fitting DN 06...DN 65 for measuring device with G 2" process connection

Standard	Article no.								
	DN 06 -1/2"	DN 08 -1/2"	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65
PVC body and PVC adapter - Fluid temperature max. 50 °C, PN 10									
FKM seal									
True union connection with nut and solvent socket									
DIN 8063	–	–	428670 	428671 	428672 	428673 	428674 	428675 	–
ASTM D 1785/76	–	–	428682 	428683 	428684 	428685 	428686 	428687 	–
JIS K	–	–	429078 	429079 	429080 	429081 	429082 	429083 	–
Solvent spigot connection									
DIN 8063	–	–	428676 	428677 	428678 	428679 	428680 	428681 	–
Analysis variant - True union connection with nut and solvent socket									
DIN 8063	–	–	430837 	430838 	430839 	428673 	428674 	428675 	–
EPDM seal									
External thread connection									
G	552561 	550062 	–	–	–	–	–	–	–
PP body and PP adapter - Fluid temperature max. 80 °C, PN 10									
FKM seal									
True union connection with nut and fusion socket									
DIN 16962	–	–	428688 	428689 	428690 	428691 	428692 	428693 	–
Fusion spigot connection									
DIN 16962	–	–	428694 	428695 	428696 	428697 	428698 	428699 	–
Analysis variant - True union connection with nut and fusion socket									
DIN 16962	–	–	430840 	430841 	430842 	428691 	428692 	428693 	–
PVDF body and PVDF adapter - Fluid temperature max. 100 °C, PN 10									
FKM seal									
True union connection with nut and fusion socket									
ISO 10931	–	–	428700 	428701 	428702 	428703 	428704 	428705 	–
Fusion spigot connection									
ISO 10931	–	–	428706 	428707 	428708 	428709 	428710 	428711 	–
Analysis variant - True union connection with nut and fusion socket									
ISO 10931	–	–	430843 	430844 	430845 	428703 	428704 	428705 	–

Straight connection for measuring device with G 2" process connection

For tank installation

Description	Article no.
Weld spigot connection without radius ^{1.)} made of stainless steel - Fluid temperature max. 160 °C, PN 16	415294 

1.) Only for analysis measuring devices

For pipe installation, DN 50...DN 400

Article no.										
DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250	DN 300	DN 350	DN 400
Weld/fusion spigot connection										
Stainless steel - with radius - Fluid temperature max. 160 °C, PN 16										
418111 	418112 	418113 	418114 	418115 	418116 	418117 	418756 	420070 	416637 	–
PE - Fluid temperature max. 70 °C, PN 10										
–	418642 	418643 	418644 	418590 	418645 	418646 	418647 	418648 	418649 	418598 
Analysis variant - PE - Fluid temperature max. 70 °C, PN 10										
–	418644 	418644 	418644 	–	–	–	–	–	–	–
PP - Fluid temperature max. 80 °C, PN 10										
–	418650 	418651 	418652 	–	418653 	418654 	418655 	418656 	418657 	–
Analysis variant - PP - Fluid temperature max. 80 °C, PN 10										
–	418652 	418652 	418652 	–	–	–	–	–	–	–
PVDF - Fluid temperature max. 100 °C, PN 10										
–	418658 	418659 	418660 	–	–	–	–	–	–	–
Analysis variant - PVDF - Fluid temperature max. 100 °C, PN 10										
–	418660 	418660 	418660 	–	–	–	–	–	–	–
Screw-on spigot connection										
PVC - Fluid temperature max. 50 °C, PN 10										
–	–	–	418170 	418170 	418170 	418170 	–	–	–	–
PE - Fluid temperature max. 70 °C, PN 10										
–	–	–	436489 	436489 	436489 	436489 	436489 	436489 	436489 	436489 
PP - Fluid temperature max. 50 °C, PN 10										
–	–	–	436488 	436488 	436488 	436488 	436488 	436488 	436488 	436488 

Saddle for flowmeter with G 2" process connection

Seal	Article no.								
	DN 50	DN 65	DN 80	DN 100	DN 110	DN 125	DN 150	DN 180	DN 200
PP body and PP adapter - Fluid temperature max. 60 °C, PN 10 (for PVC or PP pipe)									
EPDM	425138 	425139 	425140 	425141 	425142 	425143 	425144 	433873 	425416 

Measuring chamber for analysis measuring device with G 2" process connection

Description	Article no.
Measuring chamber in stainless steel 316L - 1.4404 (other material on request)	553611 

T-fitting DN 32...DN 100 for flowmeter Type 8041/8045 with clamp process connection

Standard	Article no.					
	DN 32 PN 16	DN 40 PN 16	DN 50 PN 16	DN 65 PN 16	DN 80 PN 16	DN 100 PN 10
Stainless steel - Fluid temperature max. 160 °C						
SMS 3008	–	564915 	564916 	564917 	564918 	^{1.)}
BS 4825-1/ASME BPE/DIN 11866 series C	–	564920 	564921 	564922 	564923 	564924 
DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series A	–	564925 	564926 	564927 	564928 	564929 

Straight connection DN 32...DN 100 for flowmeter Type 8041/8045 with clamp process connection

Standard	Article no.					
	DN 32 PN 16	DN 40 PN 16	DN 50 PN 16	DN 65 PN 16	DN 80 PN 16	DN 100 PN 10
Stainless steel - Fluid temperature max. 160 °C						
SMS 3008	—	564696 	564696 	564697 	564697 	1.)
BS 4825-1/ASME BPE/DIN 11866 series C	—	564698 	564698 	564699 	564699 	564699 
DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series A	—	565069 	565069 	565069 	565069 	565390 

1.) Refer to BS 4825-1/ASME BPE/DIN 11866 series C or to DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series A.

Further variants on request

Process connection

According to EN ISO 1127/ISO 4200/DIN 11866 series B (DN 32...DN 80)

9.4. Ordering chart accessories
Accessories for all variants

Description	Article no.
Approvals/Certificates	
3-point flow calibration certificate ^{1.)}	550676 
Inspection certificate 3.1 (according to EN-ISO 10204)	803723 
Test report 2.2 (according to EN-ISO 10204)	803722 
Certification of Conformity for the surface Quality (according to DIN4762, DIN4768, ISO/4287/1)	804175 
FDA declaration of conformity	803724 

1.) Type S020 combined with the inserted flowmeter, only for DN ≤ 200.

Accessories for fitting for measuring device with G 2" process connection
Note:


Since March 2012, the Type S020 fittings in DN 15 and DN 20 exist in 2 variants, with different K factors. The 2nd variant is identified by the "v2" marking.

See chapter **"7. Product accessories"** on page 19.

Accessory	Description	Article no.
Sealing plug with ring, union nut and O-ring		
	Stainless steel	438755 
	PVC	438754 
	PP	627614 
Adapter with 4 screws (DN 06...DN 65)		
	Stainless steel	555484 
	PVC	561175 
	PP	561176 
	PVDF	561177 
O-Ring set (DN 06...DN 65)		
Between fitting body and adapter		
FKM - for metal fitting (5 parts)		428971 
EPDM - for metal fitting (5 parts)		428972 
FKM - for plastic fitting (1 part ^{1.)})		561043 
EPDM - for plastic fitting (1 part ^{1.)})		561044 

1.) The O-ring is only intended for fitting body with flat bottom groove. The O-ring is not suitable for fitting body with ribbed groove (old variant).

Accessories for fitting for flowmeter Type 8041/8045 with clamp process connection

Accessory	Description	Article no.
	1 EPDM fitting/measuring device seal	730837 
	1 FEP fitting/measuring device seal	730839 
	Clamp collar	731164 
	Sealing plug for fitting	565200 