

7-2

Digital Temp. indicator
GTD-11

Summary

GTD-11 is multi-Temp. indicator to display sensing value from the signal of Temp. sensor on site.


- MULTI-POINT DISPLAY UNIT - Temp. up to 11channels
- AUTO & MANUAL SELECTOR - AUTO MODE available with channel switching time 1 ~ 9sec

Technical Data


- Range of indication : $-40\sim 150^{\circ}\text{C}$,
- Pressure : Pt1000 Ω (standard)/Pt100 Ω (option)
- Power supply : 110/220 VAC $\pm 10\%$, 50/60Hz
- Consumption power : Appr. 8VA, MAX 5W
- Accuracy : $\pm 0.5\%$ of FULL SCALE
- Channel : 11channels
- Ambient temperature : $-5\sim 50^{\circ}\text{C}$ (not frozen)
- Storage temperature : $-20\sim 60^{\circ}\text{C}$ (not frozen)
- Ambient humidity : below 95%RH
- Shape dimension : 96(W) x 96(H) x 100(D, mm)
- Products dimension : 92(W) x 92(H, mm)
- Weight : Appr. 300g
- Housing : Plastic(IP65 in front)

※ Compatible with : GPT-1000, GOT-1000, GST-1000, GDT-1000 / RTD(Pt100 Ω)


Wiring Diagram

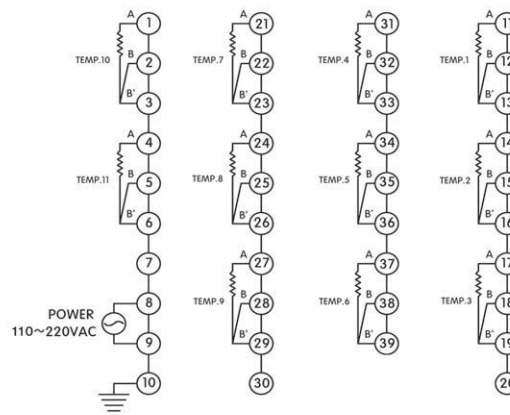

Shape Dimension

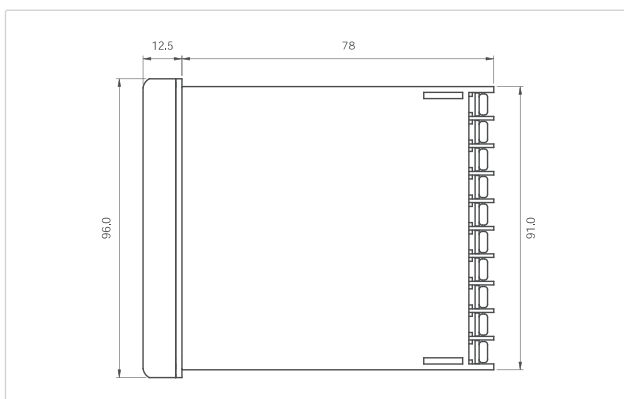

Cut-out Dimension

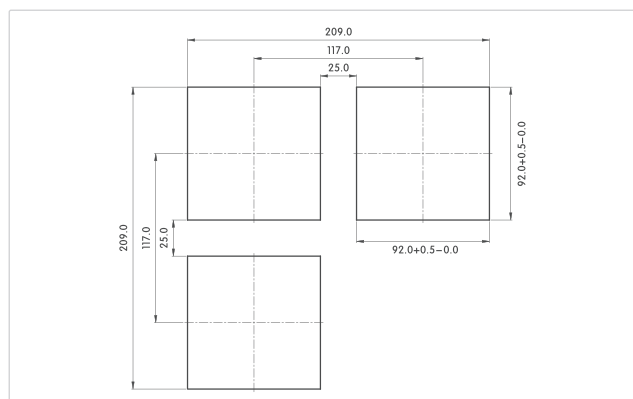

※ to be changed without notice for quality improvement