



7-1

Digital Temp. indicator GTD-5



Summary

GTD-5 is Temp. indicator to display sensing value from the signal of Temp. sensor on site.


- MULTI-POINT DISPLAY UNIT
- Temp. up to 5channels
- AUTO & MANUAL SELECTOR
- AUTO MODE available with channel switching time 1 ~ 9sec

Technical Data


- Range of indication : -40~150°C
- Pressure : Pt1000Ω(standard)/Pt100Ω(option)
- Power supply : 110/220 VAC ±10%, 50/60Hz
- Consumption power : Appr. 3VA, MAX 2W
- Accuracy : ±0.5% of FULL SCALE
- Channel : 5channels
- Ambient temperature : -5~50°C(not frozen)
- Storage temperature : -20~60°C(not frozen)
- Ambient humidity : below 95%RH
- Shape dimension : 96(W) x 48(H) x 100(D, mm)
- Products dimension : 92(W) x 45(H, mm)
- Weight : Appr. 250g
- Housing : Plastic(IP65 in front)

※ Compatible with : GPT-1000, GOT-1000, GST-1000, GDT-1000 / RTD(Pt100Ω)


Wiring Diagram

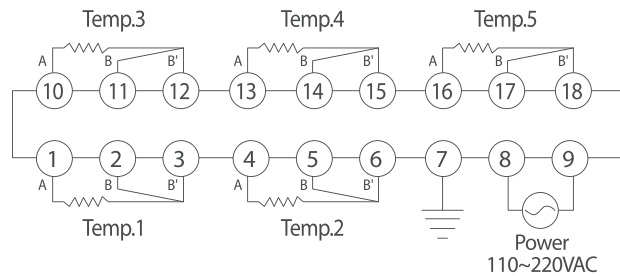

Shape Dimension

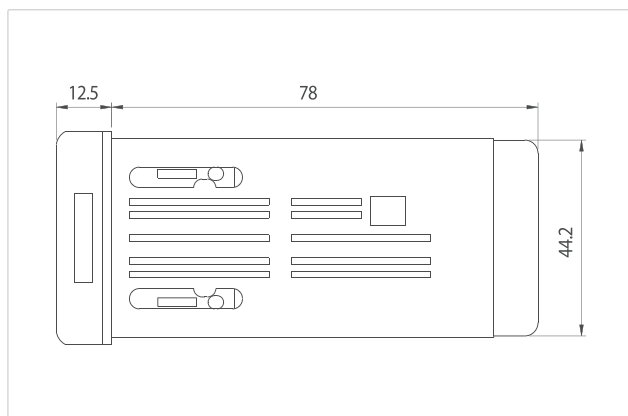

Cut-out Dimension

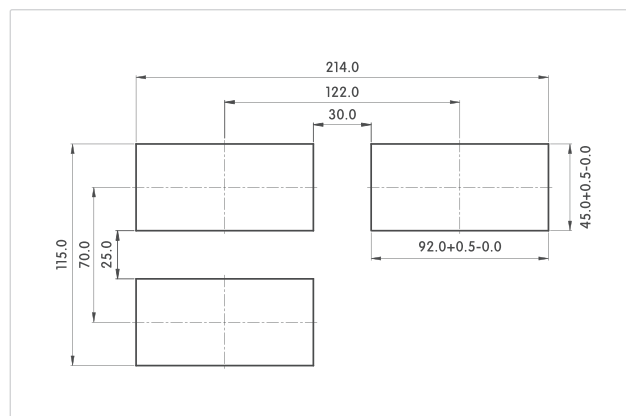

※ to be changed without notice for quality improvement