

Euro gauge

Electrical contact type diaphragm pressure gauge

Model: P570 series

Spec. sheet no. PD05-08

Service intended

P570 series are equipped with a specially designed dry-type diaphragm, and also equipped with the electrical contact block which allows all the combinations of contact to be used. The contact block is mounted on the dial, and the window is fitted with a knob for the external adjustment or the set point.

Nominal diameter

100 and 160 mm

Accuracy

±1.0 % of full scale

Scale range (MPa, kPa, bar)

0 ~ 1 kPa to 0 ~ 40 kPa (Flange 150 mm)
0 ~ 50 kPa to 0 ~ 2.5 MPa (Flange 100 mm)

Working pressure

Steady : Full scale value
Fluctuating : 90 % of full scale value

Over range protection

Overpressure safety 130% of full scale value
Overpressure safety 500% of full scale value, Max. 4 MPa (Option)

Working temperature

Ambient : -20 ~ 65 °C
Fluid : Max. 100 °C

Degree of protection

EN60529/IEC529/IP67

Temperature effect

Accuracy at temperature above and below the reference temperature (20 °C) will be effected by approximately ±0.4 % per 10 °C of full scale

Standard features

Pressure connection and under flange

Material : 304SS, 316SS, 316L SS

Window

Safety glass : Only available with diameter 100 mm
Polycarbonate : 100 and 160 mm

Upper flange (Gauge side)

Material : 304SS, 316SS

Movement

Stainless steel

Diaphragm material

≤40 kPa stainless steel (316Ti SS)
≥40 kPa duratherm 600

Dial

White aluminium with black graduations

Case

Stainless steel (304SS)

Pointer

Black painted aluminium alloy

Cover

Stainless steel (304SS)
Bayonet type

Conduit connection

M20 x 1.5

WISE®

Main order

Ordering information

1. Base model

P571 Screwed process connection
P572 "I" type flange process connection

2. Nominal diameter and window material

4 100 mm and safety glass
5 100 mm and polycarbonate window
6 160 mm and polycarbonate window

3. Contact function

1 High alarm, Normal open contact
2 High and low alarm
3 Low alarm, Normal close contact
4 Two high alarm
5 Two low alarm
6 Failsafe high and low alarm

4. Process connection

XX Refer to process connection type table

5. Under flange material

B 304SS
D 316SS
E 316L SS

6. Unit

H bar
I MPa
J kPa
S mbar

7. Range

XXX Refer to pressure unit and range table

8. Over range protection

0 Overpressure safety 130 % of full scale value
1 Overpressure safety 500 % of full scale value, Max. 4 MPa

9. Option

0 None
1 Accessories

Sample ordering code


1	2	3	4	5	6	7	8	9
P571	6	1	XX	D	H	XXX	0	0




© WISE Control Inc. All rights reserved. ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

P57X : Type of mounting (Polycarbonate window 1/2)

P571

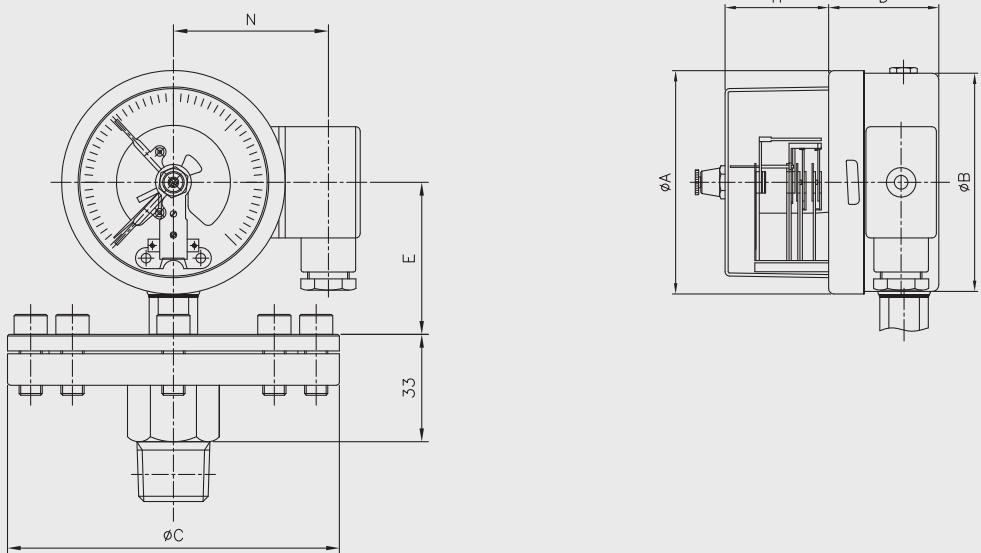

P572


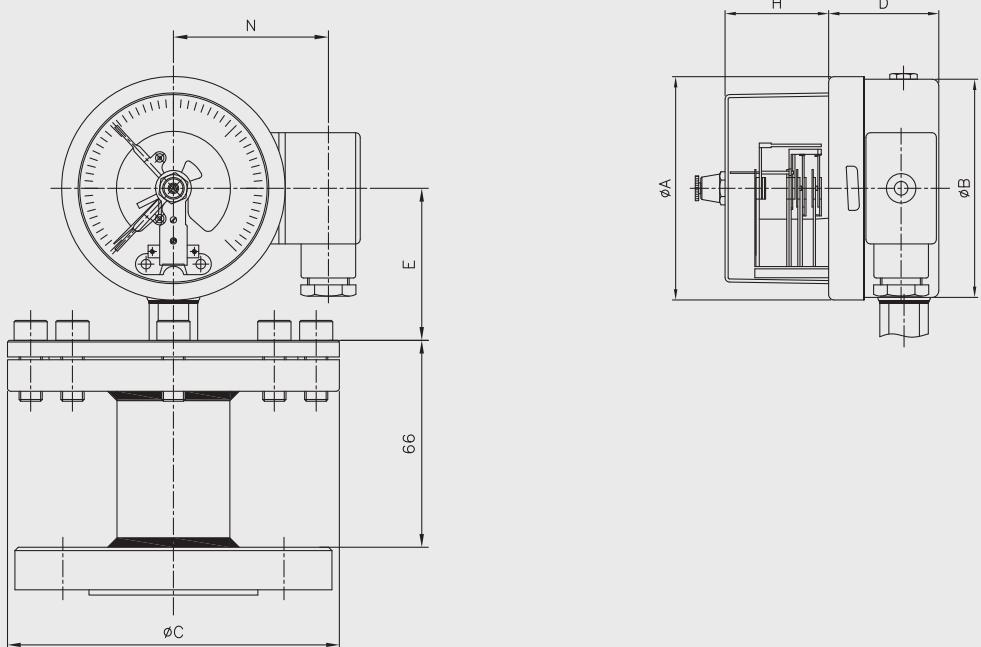


Dimensions (mm)



Dial size	A	B	D \pm 2	E \pm 2	H	N	C	
							$\leq 40\text{kPa}$	$> 40\text{kPa}$
100	101.3	99	50	78	34.5	75	150	
160	160.6	159	52.5	108	34	105	100	

P57X : Type of mounting (Safety glass window 2/2)

P571

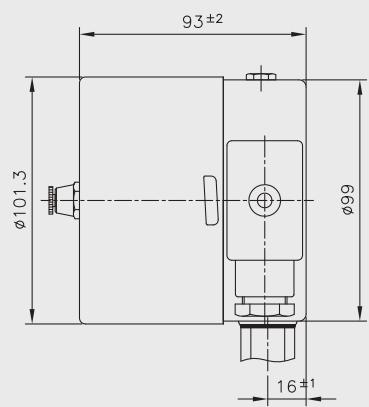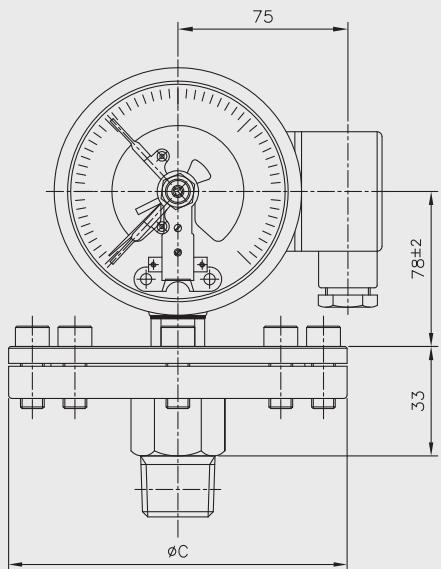

P572

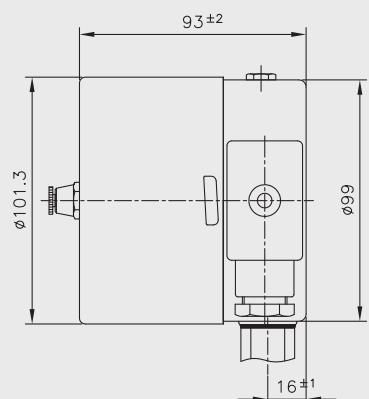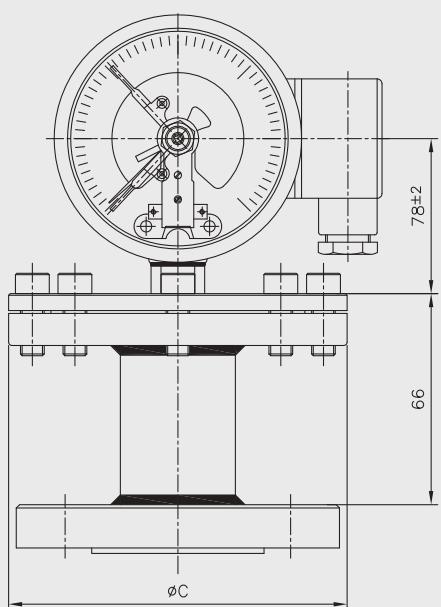

Dimensions (mm)

Dial size	C	
	≤ 40kPa	> 40kPa
100	150	100

Snap - action contacts

General

Electromechanical limit switches in pointer type measuring instruments are auxiliary current switches which open or close electrical circuits at set limit values by means of a contact arm which is moved by the actual value pointer.

The snap action contact is a mechanical contact for switching capacities up to 30 W 50 VA max.

Contact making will be delayed and or advanced in relation to the movement of the actual value pointer.

To close the circuit, the contact pin of the movable contact arm is attracted in a jump by the permanent magnet fastened to the supporting arm shortly before the set value has been reached.

Due to the retention force of the magnet, snap action contacts are more resistant against shock and vibration.

The switching safety is increased by the increased contact pressure.

When the circuit is opened, the magnet keeps the contact arm in its place until the restoring force of the measuring element exceeds the magnetic force, and the contact opens in a jump.

Specifications

Maximum contact rating with non-inductive (ohmic) load		Electric contacts type pressure gauge model P570 series	
		Dry gauges	Liquid filled gauges
Maximum voltage		250 V	250 V
Current ratings	Make ratings	1.0 A	1.0 A
	Break ratings	1.0 A	1.0 A
	Continuos load	0.6 A	0.6 A
Maximum load		30 W 50 VA	20 W 20 VA
Material of contact points		Silver-nickel alloy (80 % Ag / 20 %Ni / 10 µm) gold-plated	
Ambient operating temperature		-20 °C...+70 °C	
Max. no. of contacts		2	
Voltage test		Circuit / protective earth conductor - 2,000 vac 1 minute	
		Circuit /circuit - 2,000 vac 1 minute	

Recommended contact ratings with ohmic and inductive load


Voltage (DIN IEC 38) DC / AC		Electric contacts type pressure gauge model P570 series					
		Dry gauges			Liquid filled gauges		
		Ohmic load		Inductive load	Ohmic load		Inductive load
		DC	AC		DC	AC	
				$\cos\phi > 0.7$			$\cos\phi > 0.7$
V		mA	mA	mA	mA	mA	mA
220 / 230		100	120	65	65	90	40
110 / 110		200	240	130	130	180	85
48 / 48		300	450	200	190	330	130
24 / 24		400	600	250	250	450	150

In order to ensure a high switching reliability of the contacts the switching voltage should not be below 24 V, also taking environmental influences in the long term into account.

Contact function table

Code	Wiring scheme	Contact function		Wiebrock code no.	Slot sensor
		1 st contact	2 nd contact		
Single Contact					
1	Contact make when pointer reaches setpoint (Normal open - NO)				S/M-1 Normal use high alarm system
3	Contact break when pointer reaches setpoint (Normal close - NC)				S/M-2 Normal use low alarm system
Double Contact - Common Circuit					
4	1 st and 2 nd contact make when pointer reaches setpoint				S/M-11 Normal use high and high alarm system
6	1 st contact make 2 nd contact break when pointer reaches setpoint				S/M-12 Normal use failsafe high and low alarm system
2	1 st contact break 2 nd contact make when pointer reaches setpoint				S/M-21 Normal use high and low alarm system
5	1 st and 2 nd contact break when pointer reaches setpoint				S/M-22 Normal use low and low alarm system

Terminal block arrangement

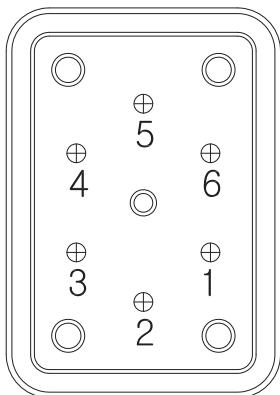

1. High alarm (S/M-1)

- ① Normal open
- ② Common
- ④ Ground

2. Low and high alarm (S/M-21)

Low alarm	High alarm
① Normal close	② Common
② Common	③ Normal open
④ Ground	

3. Low alarm (S/M-2)

- ① Normal close
- ② Common
- ④ Ground

4. Two high alarm (S/M-11)

No.1 High alarm	No.2 High alarm
① Normal open	② Common
② Common	③ Normal open
④ Ground	

5. Two low alarm (S/M-22)

No.2 Low alarm	No.1 Low alarm
① Normal close	② Common
② Common	③ Normal close
④ Ground	

6. Failsafe high and low alarm (S/M-12)

High alarm	Low alarm
② Common	① Normal open
③ Normal close	② Common
④ Ground	

Pressure unit and range table

Range and code	Unit and code				
	J : kPa	S : mbar	H : bar	I : MPa	Diaphragm material
797	0 ~ 1	0 ~ 10	X	X	
817	0 ~ 2.5	0 ~ 25	X	X	
826	0 ~ 4	0 ~ 40	X	X	
828	0 ~ 5	0 ~ 50	X	X	
830	0 ~ 6	0 ~ 60	X	X	
792	0 ~ 10	0 ~ 100	X	X	
810	0 ~ 16	0 ~ 160	X	X	
793	0 ~ 20	0 ~ 200	X	X	
818	0 ~ 25	0 ~ 250	X	X	
820	0 ~ 30	0 ~ 300	X	X	
130	0 ~ 40	0 ~ 400	0 ~ 0.4	X	
040	0 ~ 50	0 ~ 500	0 ~ 0.5	X	
131	0 ~ 60	0 ~ 600	0 ~ 0.6	X	
041	X	X	0 ~ 1	0 ~ 0.1	
042	X	X	0 ~ 2	0 ~ 0.2	
134	X	X	0 ~ 2.5	0 ~ 0.25	Duratherm 600 (75Ø)
043	X	X	0 ~ 3	0 ~ 0.3	
045	X	X	0 ~ 6	0 ~ 0.6	
143	X	X	0 ~ 16	0 ~ 1.6	
052	X	X	0 ~ 25	0 ~ 2.5	

O : Available X : Not available

Process connection type table - 8th and 9th characters

Code	8 th character		9 th character			
	Connection size	For model P571		For model P572		Flange rating
		Code	Connection type	Code		
C *	1/4"	B	PF	C		ANSI 150# FF
D *	3/8" (10A)	C	PT	B		ANSI 150# RF
E	1/2" (15A)	D	NPT	D		ANSI 150# RFSF
F	3/4" (20A)	F	BSPT	1		ANSI 150# RTJ
G	1" (25A)	G	BSPF	F		ANSI 300# FF
H	1 1/4" (32A)	H	NPS	E		ANSI 300# RF
J	1 1/2" (40A)	J	M	G		ANSI 300# RFSF
K	2" (50A)			2		ANSI 300# RTJ
L	2 1/2" (65A)			J		ANSI 600# FF
M	3" (80A)			H		ANSI 600# RF
N	4" (100A)			K		ANSI 600# RFSF
Z	Other			3		ANSI 600# RTJ
				V		ANSI 900# RF
				I		JIS 5K FF
				A		JIS 5K RF
				M		JIS 10K FF
				L		JIS 10K RF
				N		JIS 10K RFSF
				Q		JIS 20K FF
				P		JIS 20K RF
				R		JIS 20K RFSF
				T		JIS 30K FF
				S		JIS 30K RF
				U		JIS 30K RFSF
				X		JIS 40K FF
				W		JIS 40K RF
				Z		Other

* Code C and D, only available with model P571

