

Intrinsic safety and increased safety type thermocouple and resistance temperature detector

Model : R950 (ETR10 series)

Spec. sheet no. RD09-06

Service intended

Measuring the temperature in the area where combustible gas, particles and flammable liquid exist can be a very dangerous task. The electrical energy of measuring instrument is lower than electric motor, however, the malfunction of the instrument or the accident can cause to start the explosion. Therefore, ETR10 series is explosion proof type product which is designed to be used in a critical danger zone (Ex e=Zone 1, Ex ia=Zone 0) by acquiring IECEx and ATEX certification.

Certificates

KCS Ex e IIC T6...T1
 ATEX II 2G Ex e IIC T6...T1
 IECEx Ex e IIC T6...T1 Gb
 KCS Ex ia IIC T6
 ATEX II 1/2G Ex ia IIC T6...T3 Ga/Gb
 IECEx Ex ia IIC T6...T3 Ga/Gb
 CSA Ex eb IIC T6...T1 Gb
 ECAS Ex e IIC T6...T1 Gb
 ECAS Ex ia IIC T6...T3 Ga/Gb

Max. allowable pressure at stem

■Standard RTD/TC Sensor (Welded Type)
 Usable up to 18 MPa (180 bar) under static conditions. For vibration, flow, or fluctuating pressure conditions, Thermowell is recommended.

■Spring-Loaded Sensors
 These sensors do not have external pressure sealing capabilities and must always be used in conjunction with a thermowell.



Remote type



Lead wire type

Standard features

Element

RTD : Pt 100 Ω at 0 °C

	ATEX	IECEx	KCs	CSA
Ex e	K, E, N		**	K, E, N
Ex ia	K, J, T, E, N, B, R, S			-

** : KCS Ex e - K, J, T, E, N, B, R, S

Standard nipple material

304SS (Head type only)

Standard nipple length

100 or 150 mm (Head type only)

Enclosure material

Die cast aluminium (ALDC) or 316SS (Head type only)

Standard measuring material

316SS

Electrical rating

10 mA 4 VDC resistance load

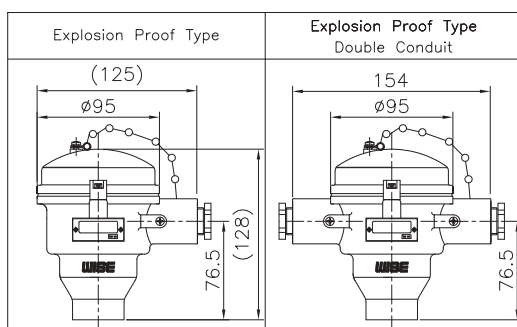
Standard process connection

½" NPT

Ambient temperature

-40 ~ +65 °C (Ex ia)
 -40 ~ +65 °C (Ex e)

Head type



1. Base model

R951	ETR10 series single element (ATEX II 1/2G Ex ia IIC T6...T3 Ga/Gb)
R952	ETR10 series double element (ATEX II 1/2G Ex ia IIC T6...T3 Ga/Gb)
R955	ETR10 series single element (ATEX II 2G Ex e IIC T6...T1 Gb)
R956	ETR10 series double element (ATEX II 2G Ex e IIC T6...T1 Gb)

2. Head type

A	Single entry head type (With ungrounded)
B	Dual entry head type (With ungrounded)
C	Single entry head type and spring load type (With ungrounded)
D	Dual entry head type and spring load type (With ungrounded)
E	Single entry head type and remote mounting with terminal head type (With ungrounded)
F	Dual entry head type and remote mounting with terminal head type (With ungrounded)
G	Extended lead wire type (With ungrounded)
H	Extended lead wire with steel armored tube type (With ungrounded)
J	Single entry head type (With grounded)
K	Dual entry head type (With grounded)
L	Single entry head type and spring load type (With grounded)
M	Dual entry head type and spring load type (With grounded)
N	Single entry head type and remote mounting with terminal head type (With grounded)
P	Dual entry head type and remote mounting with terminal head type (With grounded)
Q	Extended lead wire type (With grounded)
R	Extended lead wire with steel armored tube type (With grounded)
S	Extended lead wire type and spring load type (With ungrounded)
T	Extended lead wire with steel armored tube type and spring load type (With ungrounded)
U	Extended lead wire type and spring load type (With grounded)
V	Extended lead wire with steel armored tube type and spring load type (With grounded)

3. Element

K	K (0.75)	1	K (0.4)
J	J (0.75) **	2	J (0.4) **
T	T (0.75) **	3	T (0.4) **
E	E (0.5)	4	E (0.4)
N	N (0.75)	5	N (0.4)
Q	Pt 100 Ω (B), 3 wire	9	Pt 100 Ω (A), 3 wire
U	JPt 100 Ω (B), 3 wire	0	JPt 100 Ω (A), 3 wire
A	Pt 100 Ω (B), 4 wire	C	Pt 100 Ω (A), 4 wire
B	JPt 100 Ω (B), 4 wire	D	JPt 100 Ω (A), 4 wire
Z	Other		

** : This thermocouple type only applies to Ex ia, KCs Ex e.

4. Sheath material

1	316SS
2	Inconel 600 (Only T/C)
3	310SS (Only T/C)
6	321SS (Only T/C)
7	316L SS
8	Other (Only T/C)

Sample ordering code

1	2	3	4	5	6	7	8	9	10	11
R951	A	K	1	D9	3	A	X	XX	X	0

5. Sheath outer diameter (mm)

D9	3.2	F9	6.4
E9	4.8	G9	8.0

6-1. Conduit connection (Head type)

3	½" NPT	8	M20X1.5P
6	¾" NPT		

6-2. Electrical connection (Extended lead wire type)

A	½" PF	E	¾" PT
B	½" PT	F	¾" NPT
C	½" NPT	G	M20X1.5P
D	¾" PF	7	None
		Z	Other

7. Lead wire length (M)

A	300 mm (Lead wire type only)
B	1 (Lead wire type only)
C	2 (Lead wire type only)
D	3 (Lead wire type only)
E	4 (Lead wire type only)
F	5 (Lead wire type only)
G	6 (Lead wire type only)
H	7 (Lead wire type only)
J	8 (Lead wire type only)
K	9 (Lead wire type only)
L	10 (Lead wire type only)
Z	Lead wire type length (Other)
1	150 mm (Extended lead wire type only)
2	200 mm (Extended lead wire type only)
3	300 mm (Extended lead wire type only)
4	Extended lead wire length (Other)
0	None

8. Mounting type

X	Refer to mounting table (12 th character)
----------	--

9. Connection type

XX	Refer to mounting table (13 th and 14 th character)
-----------	---

10. Insert length (mm)

X	Refer to mounting table (15 th character)
----------	--

11. Option

0	None
1	Accessories

1. Base model

R953	ETR10 series single element (IECEX Ex ia IIC T6...T3 Ga/Gb)
R954	ETR10 series double element (IECEX Ex ia IIC T6...T3 Ga/Gb)
R957	ETR10 series single element (IECEX Ex e IIC T6...T1 Gb)
R958	ETR10 series double element (IECEX Ex e IIC T6...T1 Gb)

2. Head type

A	Single entry head type (With ungrounded)
B	Dual entry head type (With ungrounded)
C	Single entry head type and spring load type (With ungrounded)
D	Dual entry head type and spring load type (With ungrounded)
E	Single entry head type and remote mounting with terminal head type (With ungrounded)
F	Dual entry head type and remote mounting with terminal head type (With ungrounded)
G	Extended lead wire type (With ungrounded)
H	Extended lead wire with steel armored tube type (With ungrounded)
J	Single entry head type (With grounded)
K	Dual entry head type (With grounded)
L	Single entry head type and spring load type (With grounded)
M	Dual entry head type and spring load type (With grounded)
N	Single entry head type and remote mounting with terminal head type (With grounded)
P	Dual entry head type and remote mounting with terminal head type (With grounded)
Q	Extended lead wire type (With grounded)
R	Extended lead wire with steel armored tube type (With grounded)
S	Extended lead wire type and spring load type (With ungrounded)
T	Extended lead wire with steel armored tube type and spring load type (With ungrounded)
U	Extended lead wire type and spring load type (With grounded)
V	Extended lead wire with steel armored tube type and spring load type (With grounded)

3. Element

K	K (0.75)	1	K (0.4)
J	J (0.75) **	2	J (0.4) **
T	T (0.75) **	3	T (0.4) **
E	E (0.5)	4	E (0.4)
N	N (0.75)	5	N (0.4)
Q	Pt 100 Ω (B), 3 wire	9	Pt 100 Ω (A), 3 wire
U	JPt 100 Ω (B), 3 wire	0	JPt 100 Ω (A), 3 wire
A	Pt 100 Ω (B), 4 wire	C	Pt 100 Ω (A), 4 wire
B	JPt 100 Ω (B), 4 wire	D	JPt 100 Ω (A), 4 wire
Z	Other		

** : This thermocouple type only applies to Ex ia, KCs Ex e.

4. Sheath material

1	316SS
2	Inconel 600 (Only T/C)
3	310SS (Only T/C)
6	321SS (Only T/C)
7	316L SS
8	Other (Only T/C)

Sample ordering code

1	2	3	4	5	6	7	8	9	10	11
R953	A	K	1	D9	3	A	X	XX	X	0

5. Sheath outer diameter (mm)

D9	3.2	F9	6.4
E9	4.8	G9	8.0

6-1. Conduit connection (Head type)

3	½" NPT	8	M20X1.5P
6	¾" NPT		

6-2. Electrical connection (Extended lead wire type)

A	½" PF	E	¾" PT
B	½" PT	F	¾" NPT
C	½" NPT	G	M20X1.5P
D	¾" PF	7	None
		Z	Other

7. Lead wire length (M)

A	300 mm (Lead wire type only)
B	1 (Lead wire type only)
C	2 (Lead wire type only)
D	3 (Lead wire type only)
E	4 (Lead wire type only)
F	5 (Lead wire type only)
G	6 (Lead wire type only)
H	7 (Lead wire type only)
J	8 (Lead wire type only)
K	9 (Lead wire type only)
L	10 (Lead wire type only)
Z	Lead wire type length (Other)
1	150 mm (Extended lead wire type only)
2	200 mm (Extended lead wire type only)
3	300 mm (Extended lead wire type only)
4	Extended lead wire length (Other)
0	None

8. Mounting type

X	Refer to mounting table (12 th character)
----------	--

9. Connection type

XX	Refer to mounting table (13 th and 14 th character)
-----------	---

10. Insert length (mm)

X	Refer to mounting table (15 th character)
----------	--

11. Option

0	None
1	Accessories

1. Base model

- R95A** ETR10 series single element (KCS Ex ia IIC T6)
- R95B** ETR10 series double element (KCS Ex ia IIC T6)
- R95C** ETR10 series single element (KCS Ex e IIC T6...T1)
- R95D** ETR10 series double element (KCS Ex e IIC T6...T1)

2. Head type

- A** Single entry head type (With ungrounded)
- B** Dual entry head type (With ungrounded)
- C** Single entry head type and spring load type (With ungrounded)
- D** Dual entry head type and spring load type (With ungrounded)
- E** Single entry head type and remote mounting with terminal head type (With ungrounded)
- F** Dual entry head type and remote mounting with terminal head type (With ungrounded)
- G** Extended lead wire type (With ungrounded)
- H** Extended lead wire with steel armored tube type (With ungrounded)
- J** Single entry head type (With grounded)
- K** Dual entry head type (With grounded)
- L** Single entry head type and spring load type (With grounded)
- M** Dual entry head type and spring load type (With grounded)
- N** Single entry head type and remote mounting with terminal head type (With grounded)
- P** Dual entry head type and remote mounting with terminal head type (With grounded)
- Q** Extended lead wire type (With grounded)
- R** Extended lead wire with steel armored tube type (With grounded)
- S** Extended lead wire type and spring load type (With ungrounded)
- T** Extended lead wire with steel armored tube type and spring load type (With ungrounded)
- U** Extended lead wire type and spring load type (With grounded)
- V** Extended lead wire with steel armored tube type and spring load type (With grounded)

3. Element

- | | |
|--------------------------------|--------------------------------|
| K K (0.75) | 1 K (0.4) |
| J J (0.75) ** | 2 J (0.4) ** |
| T T (0.75) ** | 3 T (0.4) ** |
| E E (0.5) | 4 E (0.4) |
| N N (0.75) | 5 N (0.4) |
| Q Pt 100 Ω (B), 3 wire | 9 Pt 100 Ω (A), 3 wire |
| U JPt 100 Ω (B), 3 wire | 0 JPt 100 Ω (A), 3 wire |
| A Pt 100 Ω (B), 4 wire | C Pt 100 Ω (A), 4 wire |
| B JPt 100 Ω (B), 4 wire | D JPt 100 Ω (A), 4 wire |
| Z Other | |

* Tube (tip) type is not applicable to special grades.
 **: This thermocouple type only applies to Ex ia, KCs Ex e.

4. Sheath or Tube (Tip) material

- | Sheath type | Tube (tip) type |
|---------------------------------|------------------|
| 1 316SS | A 304SS |
| 2 Inconel 600 (Only T/C) | B 316SS |
| 3 310SS (Only T/C) | C 316L SS |
| 6 321SS (Only T/C) | |
| 7 316L SS | |
| 8 Other (Only T/C) | |

Sample ordering code

1	2	3	4	5	6	7	8	9	10	11
R95A	A	K	1	A9	3	A	X	XX	X	0

5-1. Sheath outer diameter (mm)

- | | |
|---------------------------------|---------------------------|
| A9 1.0 (Only Single T/C) | N9 6.0 |
| B9 1.6 (Only Single T/C) | F9 6.4 |
| C9 2.3 (Only T/C) | G9 8.0 |
| D9 3.2 | H9 9.5 (Only T/C) |
| E9 4.8 | L9 12.7 (Only T/C) |

5-2. Tube (tip) outer diameter (mm), Only T/C

- | | |
|---------------|-----------------|
| D8 3.2 | G8 8.0 |
| E8 4.8 | J8 10.0 |
| N8 6.0 | K8 12.0 |
| F8 6.4 | Z0 Other |

* For the head type, only G and H codes are applied.
 Contact manufacturer for other sizes.

6-1. Conduit connection (Head type)

- | | |
|-----------------|-------------------|
| 3 ½" NPT | 8 M20X1.5P |
| 6 ¾" NPT | |

6-2. Electrical connection (Extended lead wire type)

- | | |
|-----------------|-------------------|
| A ½" PF | E ¾" PT |
| B ½" PT | F ¾" NPT |
| C ½" NPT | G M20X1.5P |
| D ¾" PF | 7 None |
| | Z Other |

7. Lead wire length (M)

- A** 300 mm (Lead wire type only)
- B** 1 (Lead wire type only)
- C** 2 (Lead wire type only)
- D** 3 (Lead wire type only)
- E** 4 (Lead wire type only)
- F** 5 (Lead wire type only)
- G** 6 (Lead wire type only)
- H** 7 (Lead wire type only)
- J** 8 (Lead wire type only)
- K** 9 (Lead wire type only)
- L** 10 (Lead wire type only)
- Z** Lead wire type length (Other)
- 1** 150 mm (Extended lead wire type only)
- 2** 200 mm (Extended lead wire type only)
- 3** 300 mm (Extended lead wire type only)
- 4** Extended lead wire length (Other)
- 0** None

8. Mounting type

- X** Refer to mounting table (12th character)

9. Connection type

- XX** Refer to mounting table (13th and 14th character)

10. Insert length (mm)

- X** Refer to mounting table (15th character)

11. Option

- 0** None
- 1** Accessories

1. Base model

R95E	ETR10 series single element (CSA Ex eb IIC T6...T1 Gb)
R95F	ETR10 series double element (CSA Ex eb IIC T6...T1 Gb)

2. Head type

A	Single entry head type (With ungrounded)
B	Dual entry head type (With ungrounded)
C	Single entry head type and spring load type (With ungrounded)
D	Dual entry head type and spring load type (With ungrounded)
E	Single entry head type and remote mounting with terminal head type (With ungrounded)
F	Dual entry head type and remote mounting with terminal head type (With ungrounded)
G	Extended lead wire type (With ungrounded)
H	Extended lead wire with steel armored tube type (With ungrounded)
J	Single entry head type (With grounded)
K	Dual entry head type (With grounded)
L	Single entry head type and spring load type (With grounded)
M	Dual entry head type and spring load type (With grounded)
N	Single entry head type and remote mounting with terminal head type (With grounded)
P	Dual entry head type and remote mounting with terminal head type (With grounded)
Q	Extended lead wire type (With grounded)
R	Extended lead wire with steel armored tube type (With grounded)
S	Extended lead wire type and spring load type (With ungrounded)
T	Extended lead wire with steel armored tube type and spring load type (With ungrounded)
U	Extended lead wire type and spring load type (With grounded)
V	Extended lead wire with steel armored tube type and spring load type (With grounded)

3. Element

K	K (0.75)	1	K (0.4)
E	E (0.5)	4	E (0.4)
N	N (0.75)	5	N (0.4)
Q	Pt 100 Ω (B), 3 wire	9	Pt 100 Ω (A), 3 wire
U	JPt 100 Ω (B), 3 wire	0	JPt 100 Ω (A), 3 wire
A	Pt 100 Ω (B), 4 wire	C	Pt 100 Ω (A), 4 wire
B	JPt 100 Ω (B), 4 wire	D	JPt 100 Ω (A), 4 wire
Z	Other		

4. Sheath material

1	316SS
2	Inconel 600 (Only T/C)
3	310SS (Only T/C)
6	321SS (Only T/C)
7	316L SS
8	Other (Only T/C)

5. Sheath outer diameter (mm)

D9	3.2	F9	6.4
E9	4.8	G9	8.0

6-1. Conduit connection (Head type)

3	½" NPT	8	M20X1.5P
6	¾" NPT		

6-2. Electrical connection (Extended lead wire type)

A	½" PF	E	¾" PT
B	½" PT	F	¾" NPT
C	½" NPT	G	M20X1.5P
D	¾" PF	7	None
		Z	Other

7. Lead wire length (M)

A	300 mm (Lead wire type only)
B	1 (Lead wire type only)
C	2 (Lead wire type only)
D	3 (Lead wire type only)
E	4 (Lead wire type only)
F	5 (Lead wire type only)
G	6 (Lead wire type only)
H	7 (Lead wire type only)
J	8 (Lead wire type only)
K	9 (Lead wire type only)
L	10 (Lead wire type only)
Z	Lead wire type length (Other)
1	150 mm (Extended lead wire type only)
2	200 mm (Extended lead wire type only)
3	300 mm (Extended lead wire type only)
4	Extended lead wire length (Other)
0	None

8. Mounting type

X	Refer to mounting table (12 th character)
----------	--

9. Connection type

XX	Refer to mounting table (13 th and 14 th character)
-----------	---

10. Insert length (mm)

X	Refer to mounting table (15 th character)
----------	--

11. Option

0	None
1	Accessories

Sample ordering code

1	2	3	4	5	6	7	8	9	10	11
R95E	A	K	1	D9	3	A	X	XX	X	0

1. Base model

R95G	ETR10 series single element (ECAS Ex ia IIC T6...T3 Ga/Gb)
R95H	ETR10 series double element (ECAS Ex ia IIC T6...T3 Ga/Gb)
R95I	ETR10 series single element (ECAS Ex e IIC T6...T1 Gb)
R95J	ETR10 series double element (ECAS Ex e IIC T6...T1 Gb)

2. Head type

A	Single entry head type (With ungrounded)
B	Dual entry head type (With ungrounded)
C	Single entry head type and spring load type (With ungrounded)
D	Dual entry head type and spring load type (With ungrounded)
E	Single entry head type and remote mounting with terminal head type (With ungrounded)
F	Dual entry head type and remote mounting with terminal head type (With ungrounded)
G	Extended lead wire type (With ungrounded)
H	Extended lead wire with steel armored tube type (With ungrounded)
J	Single entry head type (With grounded)
K	Dual entry head type (With grounded)
L	Single entry head type and spring load type (With grounded)
M	Dual entry head type and spring load type (With grounded)
N	Single entry head type and remote mounting with terminal head type (With grounded)
P	Dual entry head type and remote mounting with terminal head type (With grounded)
Q	Extended lead wire type (With grounded)
R	Extended lead wire with steel armored tube type (With grounded)
S	Extended lead wire type and spring load type (With ungrounded)
T	Extended lead wire with steel armored tube type and spring load type (With ungrounded)
U	Extended lead wire type and spring load type (With grounded)
V	Extended lead wire with steel armored tube type and spring load type (With grounded)

3. Element

K	K (0.75)	1	K (0.4)
E	E (0.5)	4	E (0.4)
N	N (0.75)	5	N (0.4)
Q	Pt 100 Ω (B), 3 wire	9	Pt 100 Ω (A), 3 wire
U	JPt 100 Ω (B), 3 wire	0	JPt 100 Ω (A), 3 wire
A	Pt 100 Ω (B), 4 wire	C	Pt 100 Ω (A), 4 wire
B	JPt 100 Ω (B), 4 wire	D	JPt 100 Ω (A), 4 wire
Z	Other		

4. Sheath or Tube (Tip) material

1	316SS
2	Inconel 600 (Only T/C)
3	310SS (Only T/C)
6	321SS (Only T/C)
7	316L SS
8	Other (Only T/C)

5. Sheath outer diameter (mm)

D9	3.2	F9	6.4
E9	4.8	G9	8.0

6-1. Conduit connection (Head type)

3	½" NPT	8	M20X1.5P
6	¾" NPT		

6-2. Electrical connection (Extended lead wire type)

A	½" PF	E	¾" PT
B	½" PT	F	¾" NPT
C	½" NPT	G	M20X1.5P
D	¾" PF	7	None
		Z	Other

7. Lead wire length (M)

A	300 mm (Lead wire type only)
B	1 (Lead wire type only)
C	2 (Lead wire type only)
D	3 (Lead wire type only)
E	4 (Lead wire type only)
F	5 (Lead wire type only)
G	6 (Lead wire type only)
H	7 (Lead wire type only)
J	8 (Lead wire type only)
K	9 (Lead wire type only)
L	10 (Lead wire type only)
Z	Lead wire type length (Other)
1	150 mm (Extended lead wire type only)
2	200 mm (Extended lead wire type only)
3	300 mm (Extended lead wire type only)
4	Extended lead wire length (Other)
0	None

8. Mounting type

X	Refer to mounting table (12 th character)
----------	--

9. Connection type

XX	Refer to mounting table (13 th and 14 th character)
-----------	---

10. Insert length (mm)

X	Refer to mounting table (15 th character)
----------	--

11. Option

0	None
1	Accessories

Sample ordering code

1	2	3	4	5	6	7	8	9	10	11
R95G	A	K	1	A9	3	A	X	XX	X	0

Mounting, connection type and insert length table - 12th thru 15th characters

12 th character		13 th character		14 th character		15 th character	
Code	Mounting	Code	Connection size and connector material	Code	Connection type	Code	Insert length (mm)
A	None	A	None	A	None	A	100
	Fixed thread lag length	B	½" and 304SS	B	PT	B	200
		C	¼" and 304SS	C	NPT	C	300
C	100 mm	D	⅜" and 304SS	D	PF	D	400
D	150 mm	E	½" and 304SS	E	NPS	E	500
E	200 mm	F	¾" and 304SS	F	UNF	F	600
F	Other	G	1" and 304SS	G	BSPT	G	700
	Fixed flange lag length	H	1¼" and 304SS	H	BSPF	H	800
		J	1½" and 304SS	J	MM	J	900
H	100 mm	K	2" and 304SS	K	B16.5 Class 150 RF	K	1,000
J	150 mm	L	3" and 304SS	L	B16.5 Class 150 FF	L	1,500
K	200 mm	M	⅞" and 304SS	M	B16.5 Class 300 RF	M	2,000
L	Other	N	⅝" and 316SS	N	B16.5 Class 300 FF	N	2,500
M	Movable thread	P	¼" and 316SS	O	Sanitary	P	3,000
N	Movable flange	Q	⅜" and 316SS	P	B16.5 Class 600 RF	Q	3,500
P	Compression fitting	R	½" and 316SS	Q	B16.5 Class 600 FF	R	4,000
	Union and nipple length	S	¾" and 316SS	R	JIS 5K RF	S	4,500
Q	100 mm length	T	1" and 316SS	S	JIS 5K FF	T	5,000
R	150 mm length	U	1¼" and 316SS	T	JIS 10K RF	U	6,000
S	Other	V	1½" and 316SS	U	JIS 10K FF	V	7,000
	Nipple length	W	2" and 316SS	V	JIS 20K RF	W	8,000
		X	3" and 316SS	W	JIS 20K FF	X	9,000
U	100 mm	Y	⅞" and 316SS	X	B16.5 Class 1500 RTJ	Y	10,000
V	150 mm	Z	Other	Y	B16.5 Class 2500 RTJ	Z	Other
W	Other			Z	Other		
X	Fixed thread						
Z	Other						

- Note for 15th character, please choose a code of next higher length if applicable length is not. Actual length shall be specified.
- Note for *Y code (Oil sealing type), only available with spring-loaded head type.
- Note for 12th character, A, M, N, P, X code - Remote mounting with terminal head type and extended lead wire type only *Minimum lead wire length - 100 mm (Actual length will be specified on remark colimn.)

Tolerance classes

Thermocouple

Standard	Type	Class	Temperature range (°C)	Maximum deviation
EN 60584 IEC 584	K	1	-40~375	±1.5 °C
			375~1,000	±0.0040 X t
		2	-40~333	±2.5 °C
			333~1,200	±0.0075 X t
	E	1	-40~375	±1.5 °C
			375~800	±0.0040 X t
2		-40~333	±2.5 °C	
		333~900	±0.0075 X t	

Thermocouple

Standard	Type	Class	Temperature range (°C)	Maximum deviation
ASME/ANSI MC96.1	K	Special	0~275	±1.1 °C
			275~1,250	±0.0040 X t
		Standard	0~293	±2.2 °C
			293~1,250	±0.0075 X t
	E	Special	0~293	±1.0 °C
			293~870	±0.0040 X t
		Standard	0~293	±1.7 °C
			293~870	±0.0050 X t

Resistance thermometer

Type	Nominal resistance (Ω at 0 °C)	Class	Temperature range (°C)	Maximum deviation
Pt100	100	A	-100 to +450 / -30 to +300	±(0.15 + 0.0020 t)
		B	-196 to +600 / -50 to +500	±(0.30 + 0.0050 t)

Other option codes

This catalog provides additional optional information beyond the main ordering information for the basic models of thermocouple and RTD.

1. Select option code for Head type Conduit adapter

When using the Conduit adapter, the code selection for the material is as follows.

Base Model	Code	Code Name	Remark
R110, R120, R200, R210, R220, R300, R600, R700, R911, R912, R920, R940, R950, R960, R970	M6	General (Weather-proof) Brass + Ni Plating	The size of the conduit connection is selected in the main order of the base model.
	M7	Ex-proof Brass + Ni Plating	
	M8	General (Weather-proof) 304SS	
	MA	General (Weather-proof) 316SS	
	MB	Ex-proof 316SS	
	AD	Other (Contact the head office)	

Note.

1. See the <Table: Head information> below for the types of cable conduit that may be connected.
2. For sizes other than the conduit of the head itself, an adapter must be used.
3. Certified explosion proof cable glands must be used when installing in hazardous areas.
4. For other inquiries, please contact the head office.

<Table: Head information>

Head Type	Head Material	Head thread (Cable entry size)	Conduit Adapter	
			Size	Material
Ex-proof (Single Conduit)	ALDC	PF $\frac{1}{2}$ "(F), PF $\frac{3}{4}$ "(F), NPT $\frac{1}{2}$ "(F), NPT $\frac{3}{4}$ "(F)	NPT $\frac{1}{2}$ "(F), NPT $\frac{3}{4}$ "(F) M20X1.5P(F) PT (Unavailable)	Brass + Ni Plating 316SS
	316SS	PF $\frac{1}{2}$ "(F)		
Ex-proof (Double Conduit)	AC4C	PF $\frac{1}{2}$ "(F)		
General (Weather-Proof)	ALDC	PF $\frac{1}{2}$ "(F), PF $\frac{3}{4}$ "(F)	PT $\frac{1}{2}$ "(F), PT $\frac{3}{4}$ "(F) NPT $\frac{1}{2}$ "(F), NPT $\frac{3}{4}$ "(F) M20X1.5P(F)	Brass + Ni Plating (Only PT $\frac{1}{2}$ "(F), PT $\frac{3}{4}$ "(F)) 316SS, 304SS
	316SS 304SS	PF $\frac{3}{4}$ "(F)		
Compact (Small)	ALDC	PF $\frac{1}{2}$ "(F)		

2. Lead wire type

If the WISE standard Lead wire type is not applied, the option code below can be selected.

Base Model	Code	Code Name	Remark
R200, R300, R600, R950	E1	Only Extended lead wire	1) "E1": Lead wire disconnection 2) "E2": Use only armored tube type code for R330. 3) "E4", "E9": Only to Extension lead type 4) 316SS armored tube type (Contact the head office)
	E2	304SS armored tube type	
	E3	Shrinkable tube with 304SS armored tube type	
	E4	Outer shield	
	E8	PVC Coating with 304SS armored tube type	
	E9	Shrinkable tube type	
	EA	316SS armored tube type	
	EB	Shrinkable tube with 316SS armored tube type	
EC	PVC Coating with 316SS armored tube type		

3. Insulation material for lead wire

If the WISE standard Insulation material for Lead wire is not applied, the option code below can be selected.

Base Model	Code	Code Name	Remark
R200, R300, R600, R950	FB	Silicon	Other materials are selected after consulting the head office
	MC	PVC	
	MD	Teflon	
	ME	Non-asbestos	
	MG	Teflon (Grey)	
	AD	Other	

Note.

Extension & compensation wire (WISE Standard)

Composed of a combination of 2-item. Lead wire type and 3-item. Insulation material for lead wire.

1. Thermocouple

1.1) E4ME: Outer shield (tinned copper) + Non asbestos (200°C) (STD) - Omit code selection

1.2) MD (Teflon), MC (PVC): Single only (Excluding shield). In the case of Double, it is produced with 2 single wires.

1.3) E4MD: Outer shield (tinned copper) + Teflon (Contact the head office)

1.4) ME: Element B, R, S type - Non asbestos only (Excluding shield) - Omit code selection

2. RTD

2.1) E4MD: Outer shield (tinned copper) + Teflon (100~120°C) (STD) - Omit code selection

2.2) E4ME: Outer shield (tinned copper) + Non asbestos

2.3) MD (Teflon), MC (PVC): Single only (excluding shield). In the case of Double, it is produced with 2 single wires.

For other inquiries, please contact the head office.

4. Lead wire color

Base Model	Code	Code Name	Remark
R110, R120, R200, R210, R220, R300, R600, R700, R911, R912, R920, R940, R950, R960, R970	A0	ANSI Code	Thermocouple ANSI (ISA MC96.1) Code
	E0	EN (IEC) Code	Thermocouple EN (IEC 60584-3) Code RTD EN (IEC 60751) and JIS C 1605-2013 Code
	K0	KS Code	Thermocouple JIS C 1610 (KS C 1609) Code RTD JIS (Old), KS C 1603 Code
	Z0	Other	For other materials, contact the head office.

Note.

1. Add code when requesting lead wire standard designation. (Use WISE STD when option code is not selected)
WISE standard Thermocouple JIS C 1610 (KS C 1609) "K0", RTD EN (IEC 60751) "E0" Omit code selection.
2. If you are using a version prior to JIS C 1604-2013, select option code "K0".
If the "K0" option code is not selected, WISE standard EN (IEC 60751) colors are used.
3. RTD lead wire material (Teflon + Outer Teflon) is only available with KS C 1603 "K0" option code.
4. If the lead wire material is PVC, the standard size cannot be applied to the lead wire color.
Available in PVC manufacturer specified colors only.
5. For other inquiries, please contact the head office.

<International color code table>

(Differential colors may be used according to customer requirements.)

■ Thermocouple (TC)

Type	EN (IEC 60584-3)		ANSI (ISA MC96.1)		JIS C 1610 (KS C 1609)	
	(+)	(-)	(+)	(-)	(+)	(-)
T	Brown	White	Blue	Red	Red	White
E	Violet (Purple)	White	Purple	Red	Red	White
J	Black	White	White	Red	Red	White
K	Green	White	Yellow	Red	Red	White
N	Pink	White	Orange	Red	Red	White
B	Grey	White	Grey	Red	Red	White
R	Orange	White	Black	Red	Red	White
S	Orange	White	Black	Red	Red	White

■ Resistance thermometer detector (RTD)

IEC/EN 60751 standard applied (See applicable colors for the KS C 1603 standard)

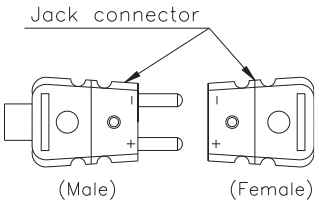
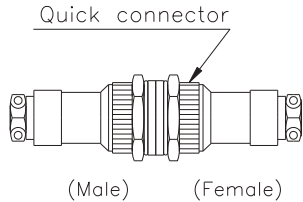



Single (3-Wire)	Double (6-Wire)	Single (4-Wire)	Double (8-Wire)

5. Lead Wire Terminal

Base Model	Code	Code Name	Remark
R200, R300, R600, R950	E5	Jack Connector (2P)	Shape reference for each type
	E6	Quick Connector	
	E7	Small Jack Connector (2P)	
R110, R120, R200, R210, R220, R230, R600, R700, R911, R912, R920, R940, R950, R960, R970	Y0	Except Terminal Lug	WISE Standard (The specifications produced without selecting other option codes are as follows.) Head type: Except Terminal Lug (STD) Non Head type: "Y" type Terminal Lug (STD)
	Y1	"O" type Terminal Lug	
	Y2	"I" type Terminal Lug	
	Y3	"Y" type Terminal Lug	

Note.

1. The shape of each type is as follows.

 <p>Jack connector</p> <p>(Male) (Female)</p>		 <p>Quick connector</p> <p>(Male) (Female)</p>	
"E5", "E7" (Jack Connector)		"E6" (Quick Connector)	
			
"Y1" ("O" type Terminal Lug)		"Y2" ("I" type Terminal Lug)	
			
		"Y3" ("Y" type Terminal Lug)	

6. Element type option (for RTD Element type)

Base Model	Code	Code Name	Remark
R220, R300, R600, R911, R912, R920, R940, R950	S0	Silicon Molding	Option applied to models except model R200 (Sheath outer diameter: 6, 6.4, 8 mm)
	Z1	Element (Other)	Cryogenic sensor

7. Terminal for Thermocouple (Head type)

Base Model	Code	Code Name	Remark
R110, R120, R300, R600, R700, R920, R940, R950, R960, R970	TK	"K" type only	If the terminal block terminal material is the same material request as the thermocouple (TC) inner conductor
	TE	"E" type only	

8. Mounting Bracket

Base Model	Code	Code Name	Remark
R120, R200, R220, R300, R600, R911, R912, R920, R940, R950	R1	2" Mounting bracket (304SS)	For dimensions and shapes other than the mounting bracket, select other "R0" and contact the head office.
	R2	2" Mounting bracket (316L SS)	
	R6	Wall Mounting bracket STD (304SS)	
	R7	Wall Mounting bracket STD (316L SS)	
	RA	Wall Mounting bracket open type (304SS)	
	RB	Wall Mounting bracket open type (316L SS)	
	RC	Wall Mounting bracket vertical (304SS)	
	RD	Wall Mounting bracket vertical (316L SS)	
	R0	Other	

Note.
Mounting Bracket shape reference.

<p align="center">"R1", "R2" (2" Mounting Bracket)</p>	<p align="center">"R6", "R7" (Wall Mounting Bracket)</p>
<p align="center">"RA", "RB" (Wall Mounting Bracket Open type)</p>	<p align="center">"RC", "RD" (Wall Mounting Bracket Vertical)</p>

9. Element post-processing

Base Model	Code	Code Name	Remark
R110, R120, R200, R210, R220, R300, R600, R911, R912, R920, R940, R950, R960	P4	Buffing (#300)	
	P6	Electrical Polishing	
	PA	Teflon Coating	
	PB	Teflon Lining	

10. Mounting type Option













Base Model	Code	Code Name	Remark
R110, R120, R200, R210, R200, R300, R600, R700, R911, R912, R920, R940, R950, R960, R970	AM	AVL Maker	1) AVL Maker: Corresponds to the use of flange or compression fitting by designated manufacturers. 2) "CF", "FT" codes are additional mounting options to the basic mounting type options. 3) "KE", "PD" applies to models R940, R950 series. 4) See other mounting type shapes.
	CF	With Compression Fitting	
	FT	With Flange (Thread type)	
	FW	With Flange (Welding type)	
	KE	With Knife Edge (Only Thermocouple)	
	MF	Movable (Ferrule type)	
	MS	Movable (Stopper type)	
	PD	With Pad	
	SF	With S-Fin	
	ST	With Shroud tube	
	T0	With Guide tube	
	T1	Above Guide tube	
	T2	Below Guide tube	
	T3	Outer protection tube	
ZZ	Mounting type (Other)		

Note.

Please select an option other than the mounting type option ordering information in the main order.

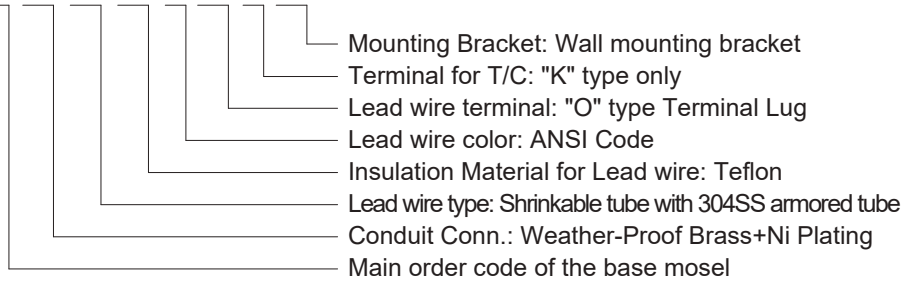
Of there is no mounting type option to select in the other option code, select mounting type (other) code "ZZ" and contact the head office.

< Other mounting type shape reference >

						
"CF" With Compression Fitting	"FT" With Flange (Thread type)	"MF" Movable (Ferrule type)	"MS" Movable (Stopper type)	"KE" With Knife Edge	"PD" With Pad	"SF" With S-Fin
						
"ST" With Shroud tube	"T0" With Guide tube	"T1" Above Guide tube	"T2" Below Guide tube	"T3" Outer Protection tube		

< Example >

R321 X X X XX X X X X X X **M8 E3 MD A Y1 K R6**



- * The above example is a thermocouple specification, and if other option codes are not selected, the code digits are not displayed.
- * The above other option codes do not apply to all models, so please inquire at the head office before selecting.
- * For order specifications or other inquiries other than the above other option codes, please contact the head office.

Large empty rectangular box for memo content.