

Sanitary bimetal thermometer (3-A Marking)

Model : T123

Spec. sheet no. TD01-06

Service intended

Sanitary bimetal thermometer is used for measuring temperature of corrosive and contaminated materials. Its usage expands to food, beverage, biochemical and pharmaceutical industry.



Nominal diameter

75 and 100 mm

Accuracy

±2.0 % of full scale

Temperature element

Coiled bimetal

Working range

Maximum scale value



Standard features

Location of stem

Bottom connection, direct

Pointer

Black painted aluminium alloy

Case

304SS

Stem

6.0, 6.4 and 8.0 mm diameter
304SS, 316SS and 316L SS

Cover

304SS

Zero adjustment

Internal

Window

Glass

Stem, process connection

Tri-clamp
1S, 1½S, 2S

Dial

Metallic silver aluminium with black graduations

Option

±1.0 % of full scale

WISE®

1. Base model

T123 Sanitary bimetal thermometer (3-A marking)

2. Nominal diameter (mm)

- 3 75
- 4 100

3. Type of mounting

W Bottom connection, direct

4. Stem material

- 0 304SS
- 1 316SS
- 2 316L SS

5. Stem, process connection

- D 1S
- E 1½S
- F 2S

6. Stem connection type

- T Tri-clamp
- U Tri-clamp (Welding type)

7. Stem outer diameter (mm)

- 0 6.0
- 1 6.4
- 2 8.0

8. Range

XXX Refer to scale range table

9. Insertion length

X Refer to insertion length table

10. Accessories

- 0 None
- 1 Thermowell
- 2 Special accuracy (±1.0 % of full scale)
- 3 Thermowell and special accuracy


Sample ordering code

1	2	3	4	5	6	7	8	9	10
T123	4	W	1	F	T	2	XXX	X	0



© WISE Control Inc. All rights reserved. ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

T123 : Stem connection type

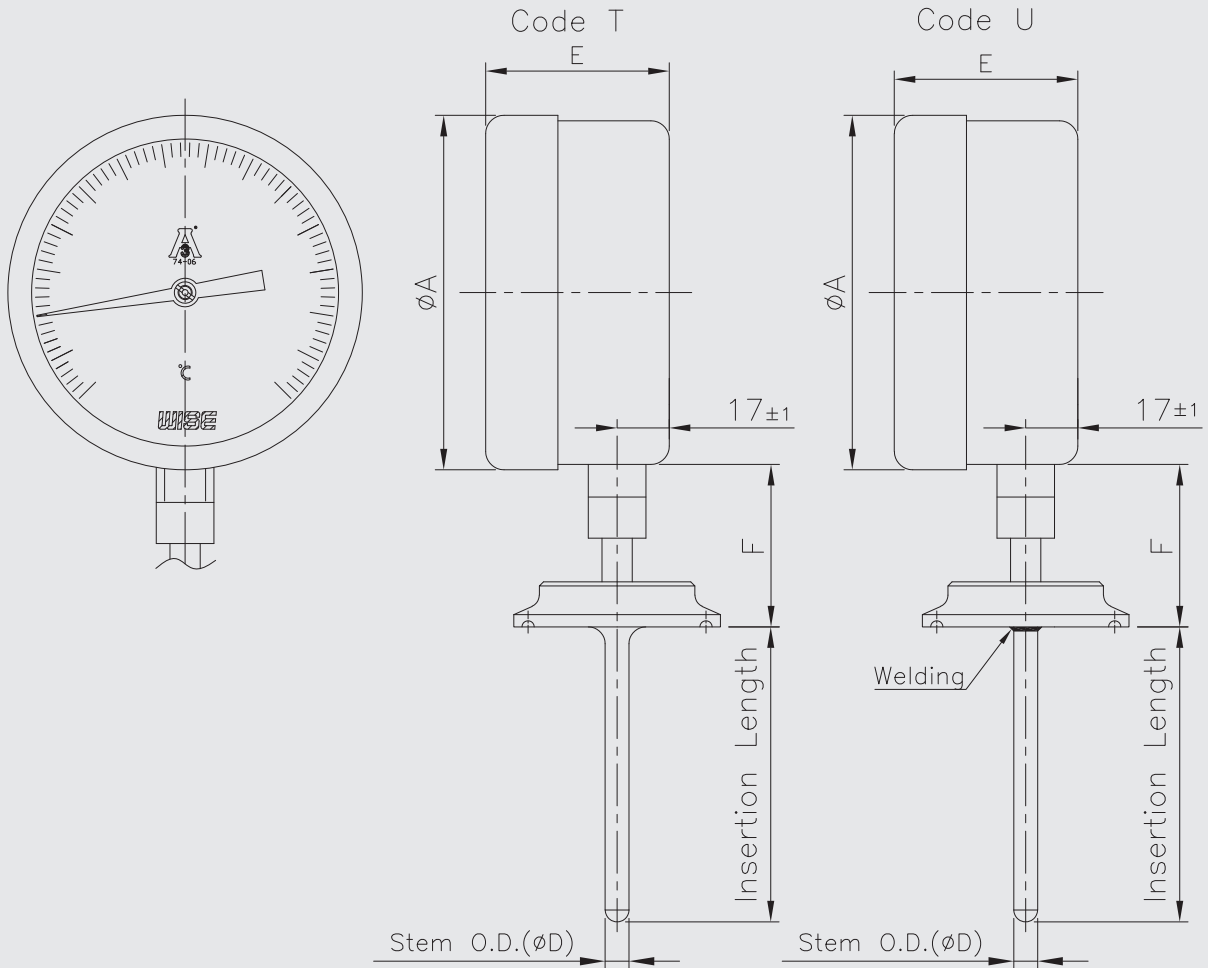

Dimensions(mm)

Dial Size	A	$E \pm 2$	$F \pm 2$
75	86.5	43	42
100	111	50.5	53

Scale ranges

Code	Scale range (°C)	Scale spacing (°C)	Minimum stem length (mm)	
			6.0 and 6.4	8.0 and 10.0
061	-30 ~ 120	2	45	35
079	-20 ~ 150	5	40	35
084	-10 ~ 50	1	95	80
106	0 ~ 120	2	50	45
109	0 ~ 150	2	45	35
114	0 ~ 200	5	35	35
119	0 ~ 250	5	35	30
124	0 ~ 300	5	35	25
129	0 ~ 350	5	30	25
134	0 ~ 400	10	80	65
144	0 ~ 500	10	70	60
154	0 ~ 600	10	70	60

Insertion length

Code	1	2	3	4	5	6	7	8	9	A	B	C
Length (mm)	50	60	70	80	100	120	130	150	175	200	225	250

Code	D	E	F	G	H	J	K	L	M	N	P
Length (mm)	275	300	350	375	400	450	500	550	1,000	1,500	2,000